

### Overview

### HP Engage One AiO System , Models 141, 143, & 145


#### FRONT VIEW



1. 14-inch diagonal display panel (wide-aspect ratio); FHD 1920 x 1080 resolution Projected Capacitive Touch Screen
2. HP Engage One AiO System Integrated Column Printer
3. Choice of 2 Engage One I/O Connectivity Bases
4. HP Engage One AiO System Integrated MSR
5. Recessed Power Button

### Overview

#### REAR VIEW

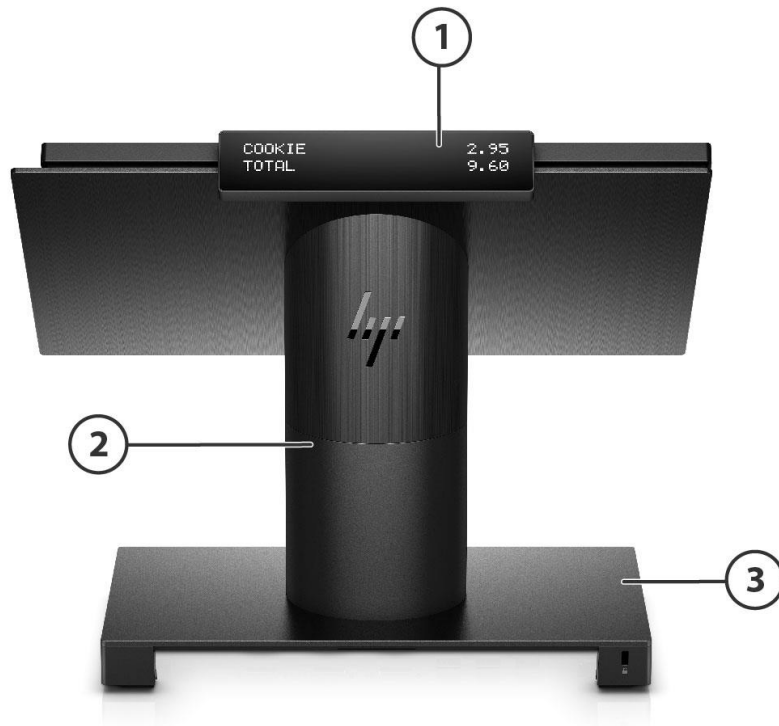


#### REAR VIEW

1. HP Engage One AiO System Top Mount 2x20 Customer-facing Display (CFD)
2. Rotate/Tilt Stand (Fixed Position Stand Available)
3. Choice of 2 Engage One AiO System I/O Connectivity Bases

### Overview

#### HP Engage One AIO System Basic I/O Connectivity Base (Rear/Side View)

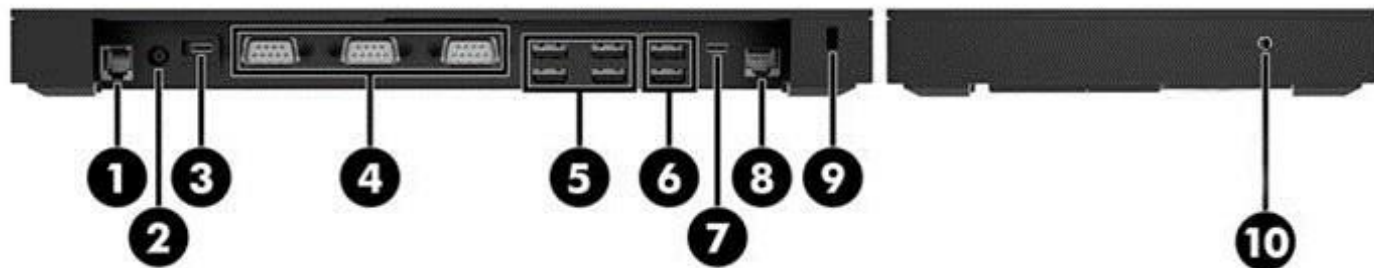


#### Basic I/O Connectivity Base components

- |                                     |                                |
|-------------------------------------|--------------------------------|
| 1. Cash drawer jack                 | 7. USB Type-C™ port- Video Out |
| 2. Power connector                  | 8. RJ-45 network jack          |
| 3. USB Type-C™ power port-Head unit | 9. Security cable slot         |
| 4. Powered serial ports (3)         | 10. Headset jack               |
| 5. USB 2.0 ports (4)                |                                |
| 6. USB 3.0 ports (2)                |                                |

**IMPORTANT:** To avoid damage to the computer, DO NOT plug a telephone cable into the cash drawer jack.

### Overview

#### Advanced I/O Connectivity Base\* (Rear/Side View)

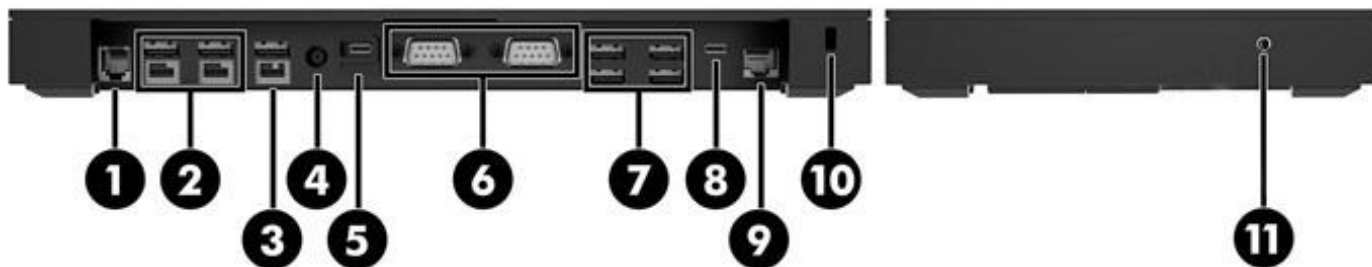

#### Advanced I/O Connectivity Base components


- |                                     |                               |
|-------------------------------------|-------------------------------|
| 1. Cash drawer jack                 | 7. USB 3.0 ports (4)          |
| 2. Powered USB 12 V ports (2)       | 8. USB Type-C™ port-Video Out |
| 3. Powered USB 24 V port            | 9. RJ-45 network jack         |
| 4. Power connector                  | 10. Security cable slot       |
| 5. USB Type-C™ power port-Head unit | 11. Headset jack              |
| 6. Powered serial ports (2)         |                               |

**IMPORTANT:** To avoid damage to the computer, **DO NOT** plug a telephone cable into the cash drawer jack.

\* Available November 2017

#### Component Breakdown

### Overview

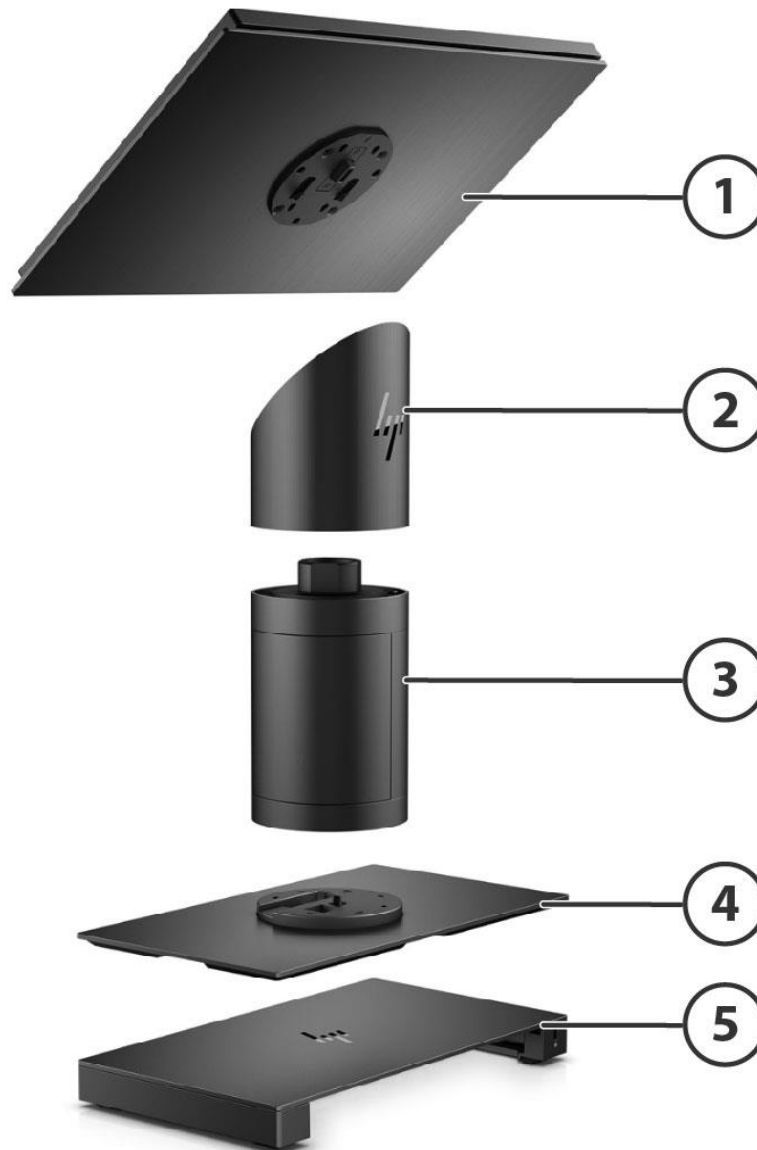

#### Component Breakdown

1. Head unit: Choice of Model 141 (Intel® Celeron® 3965U), 143 (Intel® Core™ i3 - 7100U) or 145 (Intel® i5 -7300U)\*
2. Fixed Position or Swivel & Tilt stand or No Stand Option
3. Optional Integrated Printer or Stand Spacer
4. Stability Base Plate
5. Connectivity Base: 2 Options based on I/O requirements

Not shown: Stand connects through a Single USB-C™ Cable with secure latching to connectivity base (Refer to page xxx)

### Overview

#### Stand Options



1. HP Engage One AiO System Rotate/Tilt Stand with Integrated Column Printer
2. HP Engage One AiO System Rotate/Tilt Stand
3. HP Engage One AiO System Fixed Position Stand

**NOTE:** The stands are shown on a [Stability Base Plate](#).

#### Stand Configurations



HP Engage One AiO System No Stand Option - Display Head Only (Includes 100mm VESA Mounting Bracket)



HP Engage One AiO System Fixed Position Stand with Stability Base Plate



HP Engage One AiO System Fixed Position Stand Counter Mount -No Base Plate-includes Counter Mounting Bracket

### Overview



HP Engage One AiO System Rotate/Tilt Stand with Stability Base Plate



HP Engage One AiO System Rotate/Tilt Counter Mount No Base Plate/includes Counter Mounting Bracket



HP Engage One AiO System Rotate/Tilt Stand with Integrated Printer and Stability Base Plate



HP Engage One AiO System Rotate/Tilt Stand with Integrated Printer and No Base Plate-includes counter mount

**NOTE:**The mounting bracket requires an 80 mm hole in the countertop. The thickness of the countertop must be 10mm to 50 mm.

### Overview

#### At A Glance

- Choose one of the base unit models:
  - Model 141: Intel® Celeron® 3965U 2.2GHz 2M 2133 2C6 processor
  - Model 143: Intel® Core™ i3 - 7100U 2.40GHz 3M 2133 2C6 processor\*
  - Model 145: Intel® i5 -7300U 2.60GHZ 3MB 2133 2C6 processor\*
- Choose one of the display solutions:
  - Anti-Glare WLED SVA 300-NIT panel with FHD 1920X1080 Resolution
  - Anti- Glare WLED UWVA 500-NIT panel with FHD 1920X1080 Resolution
- Select color of system and peripherals
  - Ebony Black
  - Ceramic White
- Long lifecycle performance All-in-One (AiO) Retail System for retail and hospitality markets Choice of operator display:
  - 14" diagonal Wide Aspect ratio Projected Capacitive display; Full HD SVA 1920 x 1080 Resolution, Anti-glare
  - 14" diagonal Wide Aspect ratio Projected Capacitive display; Full HD UWVA 1920 x 1080 Resolution, Anti-glare\*
- Processor choices:
  - Intel® Core™ i5-7300U with vPro<sup>1</sup> (2.6GHz, 3M Cache, 2 Cores)\*
  - Intel® Core™ i3-7100U (2.4GHz 3M Cache, 2 Cores)\*
  - Intel® Core™ Celeron® 3965U (2.2GHz, 2M Cache, 2 Cores)
- Operating System choices:
  - Windows 10 IoT Enterprise 2016 LTSB 64-bit
  - FreeDOS 2.0
- Connectivity Base Choices
  - HP Basic I/O Connectivity Base
  - HP Advanced I/O Connectivity Base
  - HP USB-C Mini Dock
- Integrated peripheral options (can also be purchased and installed separately except for the HP Engage One AiO System MSR & HP HP Engage One AiO System Column Printer which are configurable options):
  - HP Engage One MSR
  - HP Engage One Column Printer
  - HP Engage One Fingerprint Reader
  - HP Engage One Top Mount 2x20 CFD
- Industry-standard 100mm VESA mounting pattern allows for flexible use without the optional stand (Mounting hardware sold separately)
- Choice of Fixed Position Stand, Rotate/Tilt Stand that allows for 10° angle adjustability & 180-degree rotation left or right, or no stand (display – head unit only) which includes 100mm VESA Mounting Bracket
- (2) Two DDR4 Memory Slots (32 GB Maximum)
- Realtek RTL8153 Ethernet Connection
- Intel & Realtek WLAN Options
- Trusted Platform Module (TPM 2.0)
- HP BIOSphere with HP Sure Start technology
- (1) M.2 drive bay
- Cable Management Features
- ENERGY STAR® certified configurations available, EU Compliant, RoHS2 Compliant, EPEAT® Silver registered configurations available
- Basic Retail I/O connectivity Base: 120W, 88% efficient, active PFC (external)
- Advanced Retail I/O connectivity Base: 180W or 200W, 89% efficient, active PFC (external)
- Display Head unit Only 65W, 89% efficient at 20V, active PFC (external)
- Standard Warranty Options – 90/90/90, 1/1/1, 3/3/3; Plus Optional Care Packs

1. vPRO is only supported on model 145 (Intel Core i5 processor) in wireless mode, when configured with the Intel WLAN 8265 with vPRO Card

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**



### Standard and Configurable Components

#### OPERATING SYSTEM

|                     |   |
|---------------------|---|
| <b>Preinstalled</b> | Windows 10 IoT 64 Enterprise LTSC 2019<br>Windows 10 IoT Enterprise 2016 LTSB 64-bit<br>FreeDOS 2.0 |
| <b>Certified</b>    | SuSE Linux® 12 SP3**  |

**NOTE:** In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel® 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>

\*\* SUSE YES Certification is planned for late CY17 on a single platform configuration. More information about SUSE YES certification on <https://www.suse.com/partners/ihv/yes/>

The following features are not supported by SUSE Linux Enterprise Desktop:

- Power Management features
- Multi-touch capabilities
- Systems configured with Linux do not qualify for ENERGY STAR®

---

#### PROCESSORS

##### **Model 143 & 145\*\*\***

- Intel® Core™ i5-7300U with vPro<sup>1,2</sup> (2.6GHz, 3M Cache, 2 Cores)
- Intel® Core™ i3-7100U (2.4GHz 3M Cache, 2 Cores)

##### **Model 141**

- Intel® Core™ Celeron® 3965U (2.2GHz, 2M Cache, 2 Cores)

**NOTE:** Core™ i5 Turbo Boost technology – performance can be increased through the BIOS

**\*NOTE:** In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel® 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>

**\*\*NOTE:** Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

\*\*\*Available November 2017

1. vPRO is only supported on model 145 (Intel Core i5 processor) in wireless mode, when configured with the Intel WLAN 8265 with vPRO Card

### Standard and Configurable Components

2. Some functionality of vPro, such as Intel Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependant on 3rd party software providers. Compatibility with future "virtual appliances is yet to be determined.

### Standard and Configurable Components

#### CORE™ vPRO™ PROCESSORS

##### INTEL® 7th GENERATION CORE™ vPRO™ PROCESSORS

The HP Engage One AiO System Retail System features this technology, and includes processors that are part of the Intel® Stable Image.

Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP Engage One AiO System Retail System. This makes these models the most stable, secure, and manageable platforms available to retailers today.

**Intel® Advanced Management Technology (AMT) v11.6+** – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 11.6+ includes the following advanced management functions:

- Power Management (on, off, reset)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- SOL/USBR
- Cisco NAC/SDN Support
- ME Wake-on-LAN
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the PC connects to the IT or service provider console for maintenance. Remote PCs can get required patches, be inventoried, etc. by connecting to their IT console or Service Provider when it's convenient.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host-based set-up and configuration
- Management Engine (ME) firmware roll back
- Wireless AMT functionality on Desktop (WoDT)
- Enhanced KVM resolution

\*Some functionality of this technology, such as Intel Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro™ technology is dependent on 3rd party software providers. Compatibility with future "virtual appliances" is yet to be determined.

\*\* Intel® Active Management Technology requires an Intel® AMT-enabled chipset, network hardware and software, as well as connection with a power source and a corporate network connection. Setup requires configuration by the purchaser and may require scripting with the management console or further integration into existing security frameworks to enable certain functionality. It may also require modifications of implementation of new business processes.

#### CHIPSET

Intel® Multi-Chip Package – MCP

### Standard and Configurable Components

#### HP BIOS

##### Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Engage One AiO System G1 Retail System into a business environment, such as PXE, remote configuration, remote control, and F10 Setup support for 14 languages.
- Update your BIOS via the cloud or standardize on a BIOS version hosted on Enterprise network.
- Select models feature either Intel® Standard Manageability or Intel® Core™ vPro™<sup>1</sup> Processor Technology.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- UEFI specification 2.5
- Absolute Persistence agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Engage One AiO system in any retail environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to update the HP Engage One AiO System, using a host-based Windows application, various remote deployment tools (HP Client Manager, HP Software Support Manager, scheduled network updates, and fail-safe recovery). In addition, the HP Engage One AiO System system supports management tools for replicating BIOS settings throughout the Enterprise, either host-based software (HP BIOS Configuration Utility), 3rd party remote management tools such as SCCM, or manually using USB.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

##### Additional HP BIOS Features:

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. The HP Engage One AiO System Retail System uses ACPI to provide power conservation features.
- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below .5W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality and USB Charging ports.
- When the S5 Maximum Power Savings feature is enabled, only the power button will turn on the system. Other wake sources such as Wake on LAN are powered off and do not function.

##### Sure Start

- BIOS Integrity checking – Sure Start protection ensures that only trusted BIOS code is executed and not rootkits, viruses and malware. Verification is done upon boot up, shutdown and while on.
- Sure Start is set by default to automatically repair the BIOS if corrupted or compromised but is policy driven for better manageability.
- Protecting beyond BIOS – Integrity checking and repair is extended to other data that should be protected such as network configuration parameters (network name), platform specific information (i.e. system IDs) and other code the system needs to boot.
- Audit enabled – System Audit via Sure Start Event Logs capture data such as incident, repair date and time for troubleshooting and investigating.

### Standard and Configurable Components

#### Security

- HP Engage One AiO System Biometric Fingerprint Reader (optional)
- Bolt to counter mechanism
- VESA mounting
- HP Engage One AiO System Keyed Cable Lock
- HP BIOSphere with SureStart Gen 3
- Device Guard<sup>2</sup>
- Credential Guard and password protection<sup>2</sup>
- Trusted Platform Module TPM 2.0 Embedded Security Chip (SLB9670 - Common Criteria EAL4+ Certified)
- Drive lock
- USB enable/disable (via BIOS)
- Power-on password (via BIOS)
- Setup password (via BIOS)
- Tamper Resistant Screw affixed on stand of the system unit, used to secure display head to stand without Quick Release
- HP Secure Erase
- HP Multi-Factor Authenticate
- HP Sure Click (Standard)<sup>3</sup>
- HP Image Assistant
- HP vPRO Support<sup>4,5,6</sup>

1. vPRO is only supported on model 145 (Intel Core i5 processor) in wireless mode, when configured with the Intel WLAN 8265 with vPRO Card
2. Microsoft Device Guard and Credential Guard are available with Windows 10 IoT Enterprise 2016 delivered from HP or to customers with a volume license to use Windows 10 Enterprise. Microsoft Device Guard and Credential Guard are not available with Windows 10 Pro. The installation of Windows 10 Enterprise and Microsoft Device Guard and Credential Guard are available through HP Configuration & Deployment Services.
3. HP Sure Click is only supported on Intel Core i3, i5 and i7 and i9 processors
4. vPRO support requires either an Intel Core i5 or Core i7 processor
5. vPRO support also requires a vPRO WLAN Card for these products
6. vPRO enablement is a separate option on some products

**NOTE:** BIOS supports configuration on ports for the Engage One Basic I/O Connectivity Base and Engage One Advanced I/O Connectivity Base. The functionality is not supported with other products.

### Standard and Configurable Components

#### SOFTWARE

**HP Client Management Solutions** (available for free download from [hp.com/go/easydeploy](http://hp.com/go/easydeploy))

HP BIOSphere with Sure Start Generation 3.0<sup>2</sup>

HP Support Assistant

Device Guard<sup>1</sup>

Credential Guard<sup>1</sup>

1. Microsoft Device Guard and Credential Guard are available with Windows 10 IoT Enterprise 2016 delivered from HP or to customers with a volume license to use Windows 10 Enterprise. Microsoft Device Guard and Credential Guard are not available with Windows 10 Pro. The installation of Windows 10 Enterprise and Microsoft Device Guard and Credential Guard are available through HP Configuration & Deployment Services.
2. HP Sure Start Gen3 is available on products equipped with Intel® 7th generation processors.

#### GRAPHICS

##### Intel® HD Graphics (integrated)

###### Integrated Graphics

Intel Integrated HD Graphics 610 (Celeron, Model 141); Intel Integrated HD Graphics 620 (Core i3, Model 143, Core i5, Model 145)

###### DisplayPort

Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel)

###### Memory

The BIOS has options for selecting the dedicated memory size of 128MB, 256MB or 512MB  
Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

###### Maximum Graphics Memory

Windows 10

>4 GB

**NOTE:** the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.

###### Maximum Color Depth

32 bits/pixel

7th Generation Core™ processors:

- Next Generation Intel® Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience
  - Encode/transcode HD content
  - Playback of high definition content including Blu-ray Disc
  - Superior image quality with sharper, more colorful images
- DirectX Video Acceleration (DXVA) support for accelerating video processing
  - Full AVC/VC1/MPEG2/HEVC HW Decode
- Advanced Scheduler 2.0, 1.0
- Windows 10, Linux OS Support
- DirectX 12.1
- OpenGL 4.4
- Open CL 1.2 (Intel® HD Graphics 510)
- Open CL 1.2/2.0 (Intel® HD Graphics 530)

###### Graphics/Video API Support

### Standard and Configurable Components

#### Supported Display Resolutions and Refresh Rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution  | Refresh Rates |
|-------------|---------------|
| 640x480     | 60 Hz         |
| 800x600     | 60 Hz         |
| 1024x768    | 60 Hz         |
| 1280x720    | 60 Hz         |
| 1280x768    | 60 Hz         |
| 1360x768    | 60 Hz         |
| 1280x1024   | 60 Hz         |
| 1400x1050   | 60 Hz         |
| 1680x1050   | 60 Hz         |
| 1920x1080   | 60 Hz         |
| 1920x1200*  | 60 Hz         |
| 2048x1152*  | 60 Hz         |
| 2048x1280*  | 60 Hz         |
| 2048x1536*  | 60 Hz         |
| 2304x1440*  | 60 Hz         |
| 2560x1440*  | 60 Hz         |
| 3840x2160** | 30 Hz         |
| 2560x1600*  | 60 Hz         |
| 2880x1800*  | 60 Hz         |
| 3200x2400*  | 60 Hz         |
| 4096x2160*  | 60 Hz         |
| 4096x2304*  | 60 Hz         |

\* Only supported on displays connected to the external DisplayPort™ connector.

\*\* 3840x2160 is not supported for Celeron series processors

### Standard and Configurable Components

#### MEMORY

**Type**

DDR4-2400 Memory DIMMs, Transfer rates up to 2400 MT/s

**Maximum**

32 GB

**# of Slots**

2 SODIMM

**Memory Upgrades**

Both slots are customer accessible / upgradeable.

- 4 GB (4 GB x 1)
- 8 GB (4 GB x 2)
- 8 GB (8 GB x 1)
- 16 GB (8 GB x 2)
- 16 GB (16 GB x 1)
- 32 GB (16 GB x 2)

**System Memory Support**

The HP Engage One AiO System Retail System supports DDR4 protocols with two independent, 64-bit wide channels each accessing one or two SoDIMMs.

- Two channels of non-ECC DDR4 unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of one DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 2400 MT/s; actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR4 system memory I/O voltage of 1.2V
- Theoretical maximum memory bandwidth of:
  - 21.3 GB/s in dual-channel mode assuming 1333 MT/s
  - 25.6 GB/s in dual-channel mode assuming 1600 MT/s
  - 34.0 GB/s in dual-channel mode assuming 2133 MT/s
  - 38.4 GB/s in dual-channel mode assuming 2400 MT/s

**Key Benefits of DDR4 Memory:**

- Dual channel configuration – HP Engage One AiO System features motherboards designed with two memory channels instead of a single channel.
- Reduce system latencies and significantly improve your system performance with dual channel memory configurations by utilizing the theoretical bandwidth of two memory modules instead of one.
- Expect fast start-up times with reduced delays during routine operations and system maintenance functions. Meet everyday workloads head on, and run more programs simultaneously. Easily toggle back and forth between several open applications with noticeable speed.

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 2400 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

**CAUTION:** You must shut down the Retail System and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the Retail System is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.



### Standard and Configurable Components

---

#### **HARD DISK AND SOLID STATE STORAGE**

##### **Drive Bays**

- 1 (one) M.2 SSD Bays
  - PCIe (NVME)

##### **NVMe**

- 128GB TLC 6000p SSD
- 256GB PCIe NVMe TLC SSD
- 256GB TLC Pro 6000p SSD
- 512GB PCIe NVMe TLC SSD
- 512GB TLC Pro 6000p SSD
- 1TB PCIe-3x4 NVMe TLC SSD

### Standard and Configurable Components

#### OPERATOR DISPLAY

##### **14" Diagonal Wide-Aspect Operator Value Display (Model 141), Anti-Glare WLED SVA**

|                                    |   |
|------------------------------------|---|
| <b>Touch Technology</b>            | Projected Capacitive Touchscreen                |
| <b>Resolution</b>                  | 1920 x 1080                                     |
| <b>Aspect Ratio</b>                | 16:9  |
| <b>Max Color</b>                   | 262K  |
| <b>Brightness</b>                  | Typical 300 nits (LCM)*                         |
| <b>Contrast Ratio</b>              | Typical 300:1*                                  |
| <b>Pixel Pitch</b>                 | 160.86 um x 160.86 um                           |
| <b>Viewing Angle</b>               | Horizontal 90°, Vertical 65°                    |
| <b>Response rate</b>               | 10ms (Typical On/Off)                           |
| <b>Backlight</b>                   | LED   |
| <b>Operating Temperature range</b> | 0 to 60°C (+ 60°C as panel surface temperature) |

##### **14" Diagonal Wide Aspect Projective Capacitive Operator Display (Models 143 & 145), Anti-Glare WLED UWVA**

|                                    |   |
|------------------------------------|---|
| <b>Touch Technology</b>            | Projected Capacitive Touchscreen                |
| <b>Resolution</b>                  | 1920 x 1080                                     |
| <b>Aspect Ratio</b>                | 16:9  |
| <b>Max Color</b>                   | 262K  |
| <b>Brightness</b>                  | Typical 500 nits (LCM)*                         |
| <b>Contrast Ratio</b>              | Typical 800:1                                   |
| <b>Pixel Pitch</b>                 | 161um x 161 um                                  |
| <b>Viewing Angle</b>               | Horizontal 178°, Vertical 178°                  |
| <b>Response rate</b>               | 25ms (Typical On / Off)                         |
| <b>Backlight</b>                   | LED   |
| <b>Operating Temperature range</b> | 0 to 60°C (+ 60°C as panel surface temperature) |

**\*NOTE:** Nits is the measure of the typical brightness of the panel as specified, prior to anti-glare coating

### Technical Specifications - Audio

#### High Definition Audio\*

##### Engage One System Audio (Realtek ALC3228)

|                                   |   |
|-----------------------------------|---|
| <b>Type</b>                       | Integrated  |
| <b>HD Stereo Codec</b>            | ALC3228 High Definition Audio Codec   |
| <b>Internal Speaker Amplifier</b> | 1W amplifier for the internal speaker only.   |
| <b>Sampling</b>                   | All DACs support 44.1k/48k/96k/192kHz sample rate<br>All ADCs support 44.1k/48k/96k/192kHz sample rate<br>S/PDIF-OUT support 16/20/24-bit format and 32/44.1/48/88.2/96/192kHz rate |
| <b>Analog Audio</b>               | Yes   |
| <b># of Channels on Line-Out</b>  | Stereo (Left & Right channels)  |
| <b>Internal Speaker</b>           | Yes   |

##### Advanced & Basic I/O Base (Realtek ALC4040)

|                                  |  |
|----------------------------------|--|
| <b>Type</b>                      | USB  |
| <b>Audio Codec</b>               | ALC4040 Audio Codec with USB to I2S audio controller and hardware active noise cancellation  |
| <b>Audio I/O Ports</b>           | 1 headphone-out/microphone-in combo  |
| <b>Sampling</b>                  | One I2S/PCM/TDM digital interface supports sample rates 8k, 16k, 32k, 44.1k, 48k, 96k, and 192kHz<br>One stereo DAC supports up to 44.1, 48, and 192KHz Sample Rate, 16/24-bit<br>One stereo ADC Input supports 44.1, 48, and 96KHz Sample Rate, 16/24-bit |
| <b>Analog Audio</b>              | Yes  |
| <b># of Channels on Line-Out</b> | 2  |
| <b>External Speaker Jack</b>     | 1  |

**NOTE(Retail Advanced & Basic Hubs Only):** Audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled to allow independent audio streams to be sent to/from the internal speakers and headphone/Line out jack. This allows for different audio applications to use separate audio ports on the system. For example, the Headphone jack could be used with a headphone for a communications application while the internal speakers for a multimedia application.

### Technical Specifications – Storage

#### Intel 128GB Three Layer Cell 6000p Solid State Drive

|  |  |
|--|--|
| <b>Unformatted Capacity</b>                              | 128 GB   |
| <b>Architecture</b>                                      | 3D Tri-Level Cell (TLC) NAND   |
| <b>Interface</b>   | PCIe NVMe 3.0 x4   |
| <b>Form Factor</b>                                       | M.2 (80mm)   |
| <b>Height</b>  | Up to 1.5mm  |
| <b>Width</b>   | 22mm   |
| <b>Length</b>  | 80mm   |
| <b>Weight</b>  | Up to 40 g   |
| <b>Bandwidth Performance</b>                             | <b>Sustained Sequential Read:</b> Up to 770 MB/s<br><b>Sustained Sequential Write:</b> Up to 450 MB/s<br><b>Random Read</b> Up to 40k IOPS<br><b>Random Write</b> Up to 35k IOPS |
| <b>Useful Drive Life</b>                                 | 72TB written, up to 40GB/day for 5 years   |
| <b>Power</b>   | <b>Power consumption:</b> Active: 200mW Typical Idle: 50mW Typical L1.2 Sleep 5mW Typical  |
| <b>Mean Time Between Failure (MTBF)</b>                  | 1,600,000 Hours  |
| <b>Environmental</b><br>(all conditions, non-condensing) | <b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)<br><b>Vibrating – Operating</b> 2.17 GRMS (5-700Hz) Max<br><b>Vibrating – Non-Operating</b> 3.13 GRMS (5-800Hz) Max    |

#### 128GB Solid State M2 SATA-3 Three Layer Cell Drive

|                              |   |
|------------------------------|---|
| <b>Drive Weight</b>          | 0.019 lb (8.5 g)-0.022 lb (10 g)  |
| <b>Capacity</b>              | 128 GB  |
| <b>Height</b>                | 0.09 in (2.23 mm)- 0.14 in (3.58 mm)  |
| <b>Width</b>                 | 0.87 in (22 mm)   |
| <b>Interface</b>             | ATA-8, SATA 3.0   |
| <b>Bandwidth Performance</b> | <b>Maximum Sequential Read:</b> 500 ~ 540 MB/s<br><b>Maximum Sequential Write:</b> 130 ~ 450 MB/s |
| <b>Logical Blocks</b>        | 250,069,680   |
| <b>Operating Temperature</b> | 32° to 158°F (0° to 70°C)<br>[ambient temp]   |
| <b>Features</b>              | DIPM; TRIM; DEVSLP  |
| <b>Security Features</b>     | ATA Security  |

### Technical Specifications – Storage

#### 256GB M2 SATA-3 Three Layer Cell Solid State Drive

|                              |   |
|------------------------------|---|
| <b>Drive Weight</b>          | 0.022 lb (10 g)   |
| <b>Capacity</b>              | 256 GB  |
| <b>Height</b>                | 0.09 in (2.3 mm)- 0.14 in (3.58 mm)   |
| <b>Width</b>                 | 0.87 in (22 mm)   |
| <b>Interface</b>             | ATA-8, SATA 3.0   |
| <b>Bandwidth Performance</b> | <b>Maximum Sequential Read:</b> 515 ~ 540 MB/s<br><b>Maximum Sequential Write:</b> 260 ~ 450 MB/s |
| <b>Logical Blocks</b>        | 500,118,192   |
| <b>Operating Temperature</b> | 32° to 158°F (0° to 70°C) [ambient temp]  |
| <b>Features</b>              | DIPM; TRIM; DEVSLP  |
| <b>Security Features</b>     | ATA Security  |

#### 256GB PCIe NVMe Three Layer Cell Solid State Drive

|   |   |
|---|---|
| <b>Unformatted Capacity</b>                           | 256 GB  |
| <b>Architecture</b>                                   | Solid State Drive with TLC NAND Flash and PCIe interface.<br><br>Complies with NVMe Standard<br><br>Power Saving Modes: L1 substates support<br><br>Multi Queue support |
| <b>Interface</b>                                      | PCI-E Gen3 x 4  |
| <b>Form Factor</b>                                    | M.2 2280  |
| <b>Height</b>   | 3.73 mm   |
| <b>Width</b>  | 22.00 ± 0.15 mm   |
| <b>Length</b>   | 80.00 ± 0.15 mm   |
| <b>Weight</b>   | Up to 8 g   |
| <b>Bandwidth Performance</b>                          | <b>Sustained Sequential Read:</b> Up to 2600 MB/s<br><b>Sustained Sequential Write:</b> Up to 1000 MB/s   |
| <b>Power</b>  | <b>Power consumption:</b> Active: Typical 6.1W;<br>Idle: Typical 80mW<br>L1.2: Typical 5mW  |
| <b>Mean Time Between Failure (MTBF)</b>               | 1,500,000 hours   |
| <b>Environmental (all conditions, non-condensing)</b> | <b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)<br><b>Relative Humidity:</b> 5% to 95%<br><b>Shock:</b> 1,500 G/0.5 ms  |

### Technical Specifications – Storage

#### Intel 256GB Three Layer Cell Pro 6000p Solid State Drive

|  |   |                             |
|--|---|-----------------------------|
| <b>Unformatted Capacity</b>                              | 256GB*                                    |                             |
| <b>Architecture</b>                                      | 3D Tri-Level Cell (TLC) NAND              |                             |
| <b>Interface</b>   | PCIe NVMe 3.0 x4                          |                             |
| <b>Form Factor</b>                                       | M.2 22 x 80mm                             |                             |
| <b>Height</b>  | Up to 1.5mm                               |                             |
| <b>Width</b>   | 22mm                                      |                             |
| <b>Length</b>  | 80mm                                      |                             |
| <b>Weight</b>  | Up to 40 g                                |                             |
| <b>Bandwidth Performance</b>                             | Sustained Sequential Read:                | Up to 1570 MB/s             |
|  | Sustained Sequential Write:               | Up to 540 MB/s              |
|  | Random Read:                              | Up to 80K IOPs              |
|  | Random Write:                             | Up to 70K IOPs              |
| <b>Power</b>   | Total power consumption:                  | 200mW (active); 50mW (idle) |
| <b>Mean Time Between Failure (MTBF)</b>                  | 1,600,000 Hours                           |                             |
| <b>Useful Drive Life</b>                                 | 144TB written, up to 80GB/day for 5 years |                             |
| <b>Environmental</b><br>(all conditions, non-condensing) | Operating Temperature:                    | 32° to 158° F (0° to 70° C) |
|  | Vibrating - Operating:                    | 2.17 GRMS (5-700Hz) Max     |
|  | Vibrating - Non-Operating                 | 3.13 GRMS (5-800Hz) Max     |

\* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

#### 512GB M2 SATA-3 Three Layer Cell Solid State Drive

|                              |  |                |
|------------------------------|--|----------------|
| <b>Drive Weight</b>          | 0.019 lb (8.5 g)- 0.02 lb (10 g)         |                |
| <b>Capacity</b>              | 512 GB                                   |                |
| <b>Height</b>                | 0.09 in (2.3 mm)- 0.14 in (3.58 mm)      |                |
| <b>Width</b>                 | 0.87 in (22 mm)                          |                |
| <b>Interface</b>             | ATA-8, SATA 3.0                          |                |
| <b>Bandwidth Performance</b> | <b>Maximum Sequential Read:</b>          | 500 ~ 540 MB/s |
|                              | <b>Maximum Sequential Write:</b>         | 440 ~ 515 MB/s |
| <b>Logical Blocks</b>        | 1,000,215,216                            |                |
| <b>Operating Temperature</b> | 32° to 158°F (0° to 70°C) [ambient temp] |                |
| <b>Features</b>              | ATA Security, DIPM; TRIM; DEVSLP         |                |

#### 512GB PCIe NVMe Three Layer Cell Solid State Drive

|                             |   |
|-----------------------------|---|
| <b>Unformatted Capacity</b> | 512 GB  |
| <b>Architecture</b>         | Solid State Drive with TLC NAND Flash and PCIe interface. |
|                             | Complies with NVMe Standard                               |
|                             | Power Saving Modes: L1 substates support                  |
|                             | Multi Queue support                                       |

### Technical Specifications – Storage

|  |                                    |  |
|--|------------------------------------|--|
| <b>Interface</b>   | PCI-E Gen3 x 4                     |  |
| <b>Form Factor</b>                                       | M.2 2280                           |  |
| <b>Height</b>  | 3.73 mm                            |  |
| <b>Width</b>   | 22.00 ± 0.15 mm                    |  |
| <b>Length</b>  | 80.00 ± 0.15 mm                    |  |
| <b>Weight</b>  | Up to 8 g                          |  |
| <b>Bandwidth Performance</b>                             | <b>Sustained Sequential Read:</b>  | Up to 2600 MB/s  |
|  | <b>Sustained Sequential Write:</b> | Up to 1200 MB/s  |
|  | <b>Power consumption:</b>          | Active: Typical 6.1W;<br>Idle: Typical 80mW<br>L1.2: Typical 5mW |
| <b>Power</b>   |                                    |  |
| <b>Mean Time Between Failure (MTBF)</b>                  | 1,500,000 hours                    |  |
| <b>Environmental</b><br>(all conditions, non-condensing) | <b>Operating Temperature:</b>      | 32° to 158° F (0° to 70° C)                                      |
|  | <b>Relative Humidity:</b>          | 5% to 95%  |
|  | <b>Shock:</b>                      | 1,500 G/0.5 ms   |
|  |                                    |  |

### 512GB Turbo Drive G2 Multi-Layer Cell Solid State Drive

|                              |  |                    |
|------------------------------|--|--------------------|
| <b>Drive Weight</b>          | 0.02 lb (10g)                            |                    |
| <b>Capacity</b>              | 512 GB                                   |                    |
| <b>Height</b>                | 0.09 in (2.3 mm) ~ 0.14 in (3.65 mm)     |                    |
| <b>Width</b>                 | 0.87 in (22 mm)                          |                    |
| <b>Interface</b>             | PCIe NVMe Gen3X4                         |                    |
| <b>Bandwidth Performance</b> | <b>Maximum Sequential Read (128KB):</b>  | 2,260 ~ 3,000 MB/s |
|                              | <b>Maximum Sequential Write (128KB):</b> | 1,500 ~ 1,600 MB/s |
| <b>Logical Blocks</b>        | 1,000,215,216                            |                    |
| <b>Operating Temperature</b> | 32° to 158°F (0° to 70°C) [ambient temp] |                    |
| <b>Features</b>              | ATA Security (Option); TRIM; L1.2        |                    |

### Intel 512GB Three Layer Cell Pro 6000p Solid State Drive

|                              |                                    |                                 |
|------------------------------|------------------------------------|---------------------------------|
| <b>Unformatted Capacity</b>  | 512 GB                             |                                 |
| <b>Architecture</b>          | 3D Tri-Level Cell (TLC) NAND       |                                 |
| <b>Interface</b>             | PCIe NVMe 3.0 x4                   |                                 |
| <b>Form Factor</b>           | M.2 2280                           |                                 |
| <b>Height</b>                | Up to 1.5mm                        |                                 |
| <b>Width</b>                 | .22mm                              |                                 |
| <b>Length</b>                | 80mm                               |                                 |
| <b>Weight (typical)</b>      | Up to 10 g                         |                                 |
| <b>Bandwidth Performance</b> | <b>Sustained Sequential Read:</b>  | Up to 1775 MB/s                 |
|                              | <b>Sustained Sequential Write:</b> | Up to 560 MB/s                  |
|                              | <b>Random Read:</b>                | Up to 100k IOPS                 |
|                              | <b>Random Write:</b>               | Up to 90k IOPS                  |
|                              | <b>Power</b>                       | <b>Total power consumption:</b> |

### Technical Specifications – Storage

|  |   |
|--|---|
| <b>Mean Time Between Failure (MTBF)</b>                  | 1,600,000 Hours   |
| <b>Useful Drive Life</b>                                 | 288 TBW Written, up to 160GB/day for 5 Years  |
| <b>Environmental</b><br>(all conditions, non-condensing) | <b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)<br>Vibrating - Operating: 2.17 GRMS (5-700Hz) Max<br>Vibrating – Non-Operating: 3.13 GRMS (5-800Hz) Max |

---

### 1TB PCIe-3x4 NVMe Three Layer Cell Solid State Drive

|                              |  |
|------------------------------|--|
| <b>Drive Weight</b>          | 0.02 lb (10 g)   |
| <b>Capacity</b>              | 1024 GB  |
| <b>Height</b>                | 0.09 in (2.3 mm) ~ 0.14 in (3.65 mm)   |
| <b>Width</b>                 | 0.87 in (22 mm)  |
| <b>Interface</b>             | PCIe NVMe Gen3X4   |
| <b>Bandwidth Performance</b> | <b>Maximum Sequential Read:</b> 2,500 ~ 3,000 MB/s<br><b>Maximum Sequential Write:</b> 1,400~ 1,700 MB/s |
| <b>Logical Blocks</b>        | 2,000,409,264  |
| <b>Operating Temperature</b> | 32° to 158°F (0° to 70°C) [ambient temp]   |
| <b>Features</b>              | ATA Security (Option); TRIM; L1.2  |

---



### Technical Specifications – Networking and Communications

#### Realtek RTL8153

|                               |   |
|-------------------------------|---|
| <b>Connector</b>              | RJ-45   |
| <b>System Interface</b>       | USB 3.0   |
| <b>NIC Device Driver Name</b> | PCIe GBE Ethernet Family Controller   |
| <b>Ethernet Features</b>      | <p>10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)</p> <p>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)</p> <p>1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40)</p> <p>Auto-Negotiation (Automatic Speed Selection)</p> <p>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s</p> <p>IEEE 802.1p QoS (Quality of Service) Support</p> <p>IEEE 802.1q VLAN support</p> <p>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p> <p>IEEE 802.3az EEE (Energy Efficient Ethernet)</p> <p>Jumbo Frame 9K</p> <p>Auto MDI/MDIX Crossover cable detection</p> |
| <b>Power Management</b>       | <p>ACPI compliant – multiple power modes</p> <p>Situation-sensitive features reduce power consumption</p> <p>Advanced link down power saving for reducing link down power consumption</p>   |
| <b>Performance Features</b>   | <p>TCP/IP/UDP Checksum Offload (configurable)</p> <p>Protocol Offload (ARP &amp; NS)</p> <p>Large send offload and Giant send offload</p> <p>Receiving Side Scaling</p>   |
| <b>Manageability</b>          | <p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)</p> <p>PXE 2.1 Remote Boot</p> <p>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))</p> <p>Comprehensive diagnostic and configuration software suite</p> <p>Virtual Cable Doctor for Ethernet cable status</p>   |

#### Intel® Dual Band Wireless-AC 8265 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo (non-vPro and vPro)

|                               |   |
|-------------------------------|---|
| <b>Wireless LAN Standards</b> | <p>IEEE 802.11a</p> <p>IEEE 802.11b</p> <p>IEEE 802.11g</p> <p>IEEE 802.11n</p> <p>IEEE 802.11ac</p>  |
| <b>Interoperability</b>       | Wi-Fi certified   |
| <b>Frequency Band</b>         | <p>802.11b/g/n</p> <ul style="list-style-type: none"> <li>2.402 – 2.482 GHz</li> </ul> <p><b>NOTE:</b><br/>The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>802.11a/n</p> <ul style="list-style-type: none"> <li>4.9 – 4.95 GHz (Japan)</li> <li>5.15 – 5.25 GHz</li> </ul> |

### Technical Specifications – Networking and Communications

|   |   |
|---|---|
|   | <ul style="list-style-type: none"> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul> <p><b>NOTE:</b> Indonesia no support this band)</p>  |
| <b>Data Rates</b>                       | 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps<br>802.11b: 1, 2, 5.5, 11 Mbps<br>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps<br>802.11n: MCS 0 ~ MCS 15 (20MHz and 40MHz)<br>802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)  |
| <b>Modulation</b>                       | Direct Sequence Spread Spectrum<br>CCK, BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM   |
| <b>Security<sup>1</sup></b>             | <ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul> |
| <b>Network Architecture Models</b>      | Ad-hoc (Peer to Peer)<br>Infrastructure (Access Point Required)   |
| <b>Roaming</b>                          | IEEE 802.11 compliant roaming between band Access Points  |
| <b>Output Power<sup>2</sup></b>         | <ul style="list-style-type: none"> <li>• 802.11b : +16dBm minimum</li> <li>• 802.11g : +14dBm minimum</li> <li>• 802.11a : +14dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +14dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT20(5GHz) : +14dBm minimum</li> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> </ul>  |
| <b>Power Consumption</b>                | Transmit: 2.0 W (max)<br>Receive: 1.6 W (max)<br>Idle mode (PSP): 180 mW (WLAN Associated)<br>Idle mode: 50 mW (WLAN unassociated)<br>Connect Standby: 10 mW (WLAN+BT)<br>Radio disabled: 5 mW  |
| <b>Power Management</b>                 | ACPI and PCI Express compliant power management<br>802.11 compliant power saving mode   |
| <b>Receiver Sensitivity<sup>3</sup></b> | 802.11b, 1Mbps : -94dBm maximum<br>802.11b, 11Mbps : -86dBm maximum<br>802.11g, 6Mbps : -88dBm maximum<br>802.11g, 54Mbps : -74dBm maximum<br>802.11a, 6Mbps : -88dBm maximum<br>802.11a, 54Mbps : -74dBm maximum<br>802.11n, MCS07 : -69dBm maximum<br>802.11n, MCS15 : -66dBm maximum<br>802.11ac, 1SS, MCS-0 : -86dBm maximum<br>802.11ac, 1SS, MCS-9 : -61 dBm maximum<br>802.11ac, 2SS, MCS-0 : -83dBm maximum       |

### Technical Specifications – Networking and Communications

|                          |   |                                |  |
|--------------------------|---|--------------------------------|--|
| <b>Antenna type</b>      | 802.11ac, 2SS, MCS-9 : -58dBm maximum<br>High efficiency antenna with spatial diversity, mounted in the display enclosure<br>Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications  |                                |  |
| <b>Form Factor</b>       | PCI-Express M.2 MiniCard  |                                |  |
| <b>Dimensions</b>        | Type 2230 : 2.3 x 22.0 x 30.0 mm<br>Or<br>Type 1630 : 2.3 x 16.0 x 30.0 mm  |                                |  |
| <b>Weight</b>            | Type 2230 : 2.8g<br>Or<br>Type 1630 : 2g  |                                |  |
| <b>Operating Voltage</b> | 3.3v +/- 9%   |                                |  |
| <b>Temperature</b>       | Operating   | 14° to 158° F (–10° to 70° C)  |  |
|                          | Non-operating   | –40° to 176° F (–40° to 80° C) |  |
| <b>Humidity</b>          | Operating   | 10% to 90% (non-condensing)    |  |
|                          | Non-operating   | 5% to 95% (non-condensing)     |  |
| <b>Altitude</b>          | Operating   | 0 to 10,000 ft (3,048 m)       |  |
|                          | Non-operating   | 0 to 50,000 ft (15,240 m)      |  |
| <b>LED Activity</b>      | LED Amber – Radio OFF; LED White – Radio ON   |                                |  |
| <b>Notes</b>             | <p>1. <a href="#">Check latest software/driver release for updates on supported security features.</a></p> <p>2. <a href="#">Maximum output power may vary by country according to local regulations.</a></p> <p>3. <a href="#">Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</a></p> <p>* <a href="#">Wireless access point and internet service required. Availability of public wireless access points limited.</a></p> |                                |  |

#### HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology (System Bluetooth Specifications)

|                                     |   |                  |                   |
|-------------------------------------|---|------------------|-------------------|
| <b>Bluetooth Specification</b>      | 4.0+EDR Compliant   |                  |                   |
| <b>Frequency Band</b>               | 2402 to 2480 MHz  |                  |                   |
| <b>Number of Available Channels</b> | 79 (1 MHz) available channels   |                  |                   |
| <b>Data Rates and Throughput</b>    | 3 Mbps data rate; throughput up to 2.17 Mbps<br>Synchronous Connection Oriented links up to 3, 64 kbps, voice channels<br>Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric |                  |                   |
| <b>Transmit Power</b>               | The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.  |                  |                   |
| <b>Receiver Sensitivity</b>         | <b>Modulation</b>   | <b>0.01% BER</b> | <b>0.001% BER</b> |
|                                     | GFSK  | -80 dBm          | -70 dBm           |

### Technical Specifications – Networking and Communications

|  |   |         |         |
|--|---|---------|---------|
|  | $\pi$ /4-DQPSK  | -80 dBm | -70 dBm |
|  | 8DPSK   | -80 dBm | -70 dBm |
| <b>Power Consumption</b>                     | Peak (Tx) 330 mW  |         |         |
|  | Peak (Rx) 230 mW  |         |         |
|  | Selective Suspend 17 mW   |         |         |
| <b>Range</b>                                 | Up to 33 ft (10 m)  |         |         |
| <b>Electrical Interface</b>                  | USB 2.0 compliant   |         |         |
| <b>Bluetooth Software Supported</b>          | Microsoft Windows Bluetooth Software  |         |         |
| <b>Link Topology</b>                         |   |         |         |
| <b>Electrical Interface</b>                  | Point to Point, Multipoint Pico Nets up to 7 slaves   |         |         |
| <b>Bluetooth Software Supported Security</b> | Full support of Bluetooth Security Provisions   |         |         |
| <b>Power Management</b>                      | Microsoft Windows ACPI, and USB Bus Support   |         |         |
| <b>Power Management Certifications</b>       | Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff |         |         |
| <b>Security Certifications</b>               | All necessary regulatory approvals for supported countries, including:  |         |         |
| <b>Bluetooth Profiles Supported</b>          | FCC (47 CFR) Part 15C, Section 15.247 & 15.249  |         |         |
| <b>Power Management Certifications</b>       | ETS 300 328, ETS 300 826  |         |         |
| <b>Certifications</b>                        | Low Voltage Directive IEC950  |         |         |
| <b>Bluetooth Profiles Supported</b>          | UL, CSA, and CE Mark  |         |         |
|  | Serial Port Profile (SPP) <sup>1</sup>  |         |         |
|  | Service Discovery Application Profile (SDAP)  |         |         |
|  | Dial-Up Networking (DUN) <sup>1,2</sup>   |         |         |
|  | Generic Object Exchange Profile (GOEP) <sup>1,2</sup>   |         |         |
|  | Object Push Profile (OPP) <sup>1,2</sup>  |         |         |
|  | File Transfer Profile (FTP)   |         |         |
|  | Synchronization Profile (SYNC)  |         |         |
|  | Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>   |         |         |
|  | Personal Area Networking Profile (PAN) <sup>1,2</sup>   |         |         |
|  | Human Interface Device Profile (HID) <sup>1,2</sup>   |         |         |
|  | FAX Profile (FAX)   |         |         |
|  | Basic Imaging Profile (BIP) <sup>2</sup>  |         |         |
|  | Headset Profile (HSP)   |         |         |
|  | Hands Free Profile (HFP)  |         |         |
|  | Advanced Audio Distribution Profile (A2DP)  |         |         |

### Realtek 802.11b/g/n (1x1) WiFi and Bluetooth® 4.0 Combo

|                               |                 |
|-------------------------------|-----------------|
| <b>Wireless LAN Standards</b> | IEEE 802.11b    |
|                               | IEEE 802.11g    |
|                               | IEEE 802.11n    |
| <b>Interoperability</b>       | Wi-Fi certified |
| <b>Frequency Band</b>         | 802.11b/g/n     |

### Technical Specifications – Networking and Communications

- 2.402 – 2.482 GHz

**NOTE:** The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

#### Data Rates

- 802.11b: 1, 2, 5.5, 11 Mbps
- 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n: MCS 0 ~ MCS 07, (20MHz)

#### Modulation

Direct Sequence Spread Spectrum  
BPSK, QPSK, CCK, 16-QAM, 64-QAM,

#### Security<sup>1</sup>

- IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only
- AES-CCMP: 128 bit in hardware
- 802.1x authentication
- WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through CCX4 and CCX Lite
- WAPI

#### Network Architecture Models

Ad-hoc (Peer to Peer)  
Infrastructure (Access Point Required)

#### Roaming

IEEE 802.11 compliant roaming between access points

#### Output Power<sup>2</sup>

802.11b : +16dBm minimum  
802.11g : +14dBm minimum  
802.11n HT20(2.4GHz) : +13dBm minimum  
802.11n HT40(2.4GHz) : +13dBm minimum  
802.11n HT20(5GHz) : +12dBm minimum  
802.11n HT40(5GHz) : +12dBm minimum

#### Power Consumption

Transmit: 2.0 W (max)  
Receive: 1.6 W (max)  
Idle mode (PSP): 180 mW (WLAN Associated)  
Idle mode: 60 mW (WLAN unassociated)  
Radio disabled: 30 mW

#### Power Management

ACPI and PCI Express compliant power management 802.11 compliant power saving mode

#### Receiver Sensitivity<sup>3</sup>

802.11b, 1Mbps : -94dBm maximum  
802.11b, 11Mbps : -86dBm maximum  
802.11g, 6Mbps : -88dBm maximum  
802.11g, 54Mbps : -74dBm maximum  
802.11n, MCS07 : -69dBm maximum  
802.11n, MCS15 : -66dBm maximum

#### Antenna type

High efficiency antenna with spatial diversity, mounted in the display enclosure

Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications. (Support Dual antenna or Single antenna, depend on platform requirement)

#### Form Factor

PCI-Express M.2 MiniCard

#### Dimensions

Type 2230 : 2.3 x 22.0 x 30.0 mm  
Or  
Type 1630 : 2.3 x 16.0 x 30.0 mm

#### Weight

Type 2230 : 2.8g  
Or  
Type 1630 : 2g

#### Operating Voltage

3.3v +/- 9%

### Technical Specifications – Networking and Communications

|                     |   |                                |
|---------------------|---|--------------------------------|
| <b>Temperature</b>  | Operating                                   | 14° to 158° F (–10° to 70° C)  |
|                     | Non-operating                               | –40° to 176° F (–40° to 80° C) |
| <b>Humidity</b>     | Operating                                   | 10% to 90% (non-condensing)    |
|                     | Non-operating                               | 5% to 95% (non-condensing)     |
| <b>Altitude</b>     | Operating                                   | 0 to 10,000 ft (3,048 m)       |
|                     | Non-operating                               | 0 to 50,000 ft (15,240 m)      |
| <b>LED Activity</b> | LED Amber – Radio OFF; LED White – Radio ON |                                |

1. Check latest software/driver release for updates on supported security features.
  2. Maximum output power may vary by country according to local regulations.
  3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
-

### Technical Specifications

#### POWER

|                                       |   |
|---------------------------------------|---|
| <b>Power Supply</b>                   | 120W for Basic Retail I/O connectivity Base, 180W or 200W for Advanced Retail I/O connectivity Base, 65W for Display Head Unit Only<br>120W, 88% efficient, active PFC (external), 180W or 200W, 89% efficient, active PFC (external), 65W, 89% efficient at 20V, active PFC (external)   |
| <b>Operating Voltage Range</b>        | 90V~264VAC  |
| <b>Rated Voltage Range</b>            | 100V~240AC  |
| <b>Rated Line Frequency</b>           | 50~60HZ   |
| <b>Operating Line Frequency Range</b> | 47~63HZ   |
| <b>Rated Input Current</b>            | <2.2A/120W, <2.52A/180W, <2.9A/200W, 1.7A/65W   |
| <b>Power Supply Fan</b>               | N/A   |
| <b>ENERGY STAR® Compliant</b>         | ENERGY STAR® certified configurations available and EPEAT® registered configurations available  |
| <b>Power Cord Length</b>              | 2 I/O Base Cable Options:<br>(1) 45cm – when I/O Base is attached to Stand<br>(2) 1.8m – when I/O Base is detached or display head only   |
| <b>Current Leakage (NFPA99)</b>       | Less than 300 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1 of “National Fire Protection Association standard” NFPA99 2012 edition.<br><br>Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1 of “National Fire Protection Association standard” NFPA99 2012 edition. |

**NOTE:** This power supply meets ENERGY STAR® compliance in conjunction with a select range of processors and modules.

#### WEIGHTS & DIMENSIONS

**NOTE:** Weight and dimensions below do not include MSR, Biometric Reader, Webcam, or CFD.

| Head unit (no MSR)        |  |
|---------------------------|--|
| <b>Product Dimensions</b> | 336.2mm (L) X 216.4mm (D) X 17.6mm (H) , 13.2in x 8.5in x .7in |
| <b>Dimension Note</b>     | Without stand  |

| Rotate / tilt stand & fixed position stand/Column Printer |  |
|---|--|
| <b>Product Dimensions</b>                                 | 96(L) x 96(D) x 220(H) mm / 260 (H) mm, 3.8in (L) x 3.8in (D) x 8.7in (H) / 10.2in (H) |
| <b>Dimension Note</b>                                     | Fixed Position Stand & Rotate Tilt Stand w/ Integrated Column Printer                  |

| Retail I/O connectivity Base |   |
|------------------------------|---|
| <b>Product Dimensions</b>    | 284 (L) x 162(D) x 29.2(H) mm, 11.2in (L) x 6.4in (D) x 1.1in (H) |
| <b>Dimension Note</b>        | Connectivity Base Only  |

### Technical Specifications

#### Display Head Unit with collar

|                    |   |
|--------------------|---|
| <b>Weight</b>      | 1.4 kg / 3.1 lbs  |
| <b>Weight Note</b> | Starting weight without stand. Exact weight depends on configuration. |

#### Rotate / Tilt Stand

|                    |                                  |
|--------------------|----------------------------------|
| <b>Weight</b>      | 1.3 kg / 3.0 lbs                 |
| <b>Weight Note</b> | Weight of Rotate/Tilt Stand only |

#### Fixed Position Stand

|                    |                                     |
|--------------------|-------------------------------------|
| <b>Weight</b>      | 1.1 kg / 2.4 lbs                    |
| <b>Weight Note</b> | Weight of Fixed Position Stand only |

#### Retail I/O Connectivity Base

|                    |                                  |
|--------------------|----------------------------------|
| <b>Weight</b>      | .6 kg / 1.3 lbs                  |
| <b>Weight Note</b> | Weight of Connectivity Base only |

#### Packaging Carton (Display Head & Hub Only)

|                             |   |
|-----------------------------|---|
| <b>Packaging Dimensions</b> | 552mm (L) X 165mm (D) X 318mm (H) , 21.7in x 6.5in x 12.5in |
|-----------------------------|---|

#### Packaging Carton (Display Head, Stand & Hub)

|                             |  |
|-----------------------------|--|
| <b>Packaging Dimensions</b> | 495mm (L) X 295mm (D) X 453mm (H) , 19.5in x 11.6in x 17.8in |
|-----------------------------|--|

#### Bundled Packaging

|                    |                                  |
|--------------------|----------------------------------|
| <b>Weight</b>      | 11.8 kg / 26 lbs                 |
| <b>Weight Note</b> | Weight of Bundled Packaging only |

#### Display Head Only Packaging

|                    |                                       |
|--------------------|---------------------------------------|
| <b>Weight</b>      | 4.3 kg / 9.3 lbs                      |
| <b>Weight Note</b> | Weight of Display Head Packaging only |

#### Standard Packaging

|                    |                                   |
|--------------------|-----------------------------------|
| <b>Weight</b>      | 7.2 kg / 15.9 lbs                 |
| <b>Weight Note</b> | Weight of Standard Packaging only |



### Technical Specifications

#### MISCELLANEOUS FEATURES

##### Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode.
- Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel® Wired for Management support; industry wide initiative to make Intel® architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

##### HP Point of Sale Diagnostics UEFI:

- This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support

##### Serviceability Features:

- System/Emergency ROM
- Flash ROM
- Flash Recovery with Video Configuration Record Software
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- Clear CMOS Button
- Color coordinated cables and connectors
- Front power switch
- System memory can be upgraded without removing the system board or any internal components

#### Interpreting System Validation Diagnostic Front Panel LEDs and Audible Codes

During the system validation phase that occurs at system startup, the BIOS validates the functionality of the following subsystems and conditions:

- AC adapter
- System board power
- Processor failure
- BIOS corruption
- Memory failure
- Graphics failure
- System board failure
- BIOS authentication failure

If an error is detected, specific patterns of long and short blinks, accompanied by long and short beeps (where applicable) are used to identify the error. These patterns will make up a two part code:

- Major – the category of the error
- Minor – the specific error within the category

 **NOTE:** Single beep/blink codes are not used.

| Number of long beeps/blinks | Error category |
|-----------------------------|----------------|
| 1                           | Not used       |
| 2                           | BIOS           |

### Technical Specifications

|   |              |
|---|--------------|
| 3 | Hardware     |
| 4 | Thermal      |
| 5 | System board |

Patterns of blink/beep codes are determined by using the following parameters:

- 1 second pause occurs after the last major blink.
- 2 second pause occurs after the last minor blink.
- Beep error code sequences occur for the first 5 iterations of the pattern and then stop.
- Blink error code sequences continue until the computer is unplugged or the power button is pressed.



**NOTE:** Not all diagnostic lights and audible codes are available on all models.

The red LED blinks to represent the major error category (long blinks). The white LED blinks to represent the minor error category (short blinks). For example, '3.5' indicates 3 long red blinks and 5 short white blinks to communicate the processor is not detected.

| Category     | Major/minor code | Description  |
|--------------|------------------|--|
| BIOS         | 2.2              | The main area (DXE) of BIOS has become corrupted and there is no recovery binary image available.  |
|              | 2.3              | The embedded controller policy requires the user to enter a key sequence.  |
|              | 2.4              | The embedded controller is checking or recovering the boot block.  |
| Hardware     | 3.2              | The embedded controller has timed out waiting for BIOS to return from memory initialization.   |
|              | 3.3              | The embedded controller has timed out waiting for BIOS to return from graphics initialization.   |
|              | 3.4              | The system board displays a power failure (crowbar).*  |
|              | 3.5              | The processor is not detected.*  |
|              | 3.6              | The processor does not support an enabled feature.   |
|              | Thermal          | 4.2  |
| 4.3          |                  | An ambient temperature over temperature condition has been detected.   |
| 4.4          |                  | An MXM over temperature condition has been detected.   |
| System board | 5.2              | The embedded controller cannot find valid firmware.  |
|              | 5.3              | The embedded controller has timed out waiting for the BIOS.  |
|              | 5.4              | The embedded controller has timed out waiting for BIOS to return from system board initialization.   |
|              | 5.5              | The embedded controller rebooted the system after a possible lockup condition had been detected through the use of a System Health Timer, Automated System Recovery Timer, or other mechanism. |

\* Indicates hardware triggered event; all other events are controlled by the BIOS.

### Additional Features Description

### Technical Specifications

|  |  |
|--|--|
| <b>Drive Lock</b>  | Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.<br>DPS Access through F10 Setup during Boot<br>A diagnostic hard drive self-test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user                                       |
| <b>Drive Protection System</b>   | Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced<br>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures |
| <b>SMART Technology (Self-Monitoring, Analysis and Reporting Technology)</b> | Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted  |
| <b>SMART I - Drive Failure Prediction</b>                                    | Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count  |
| <b>SMART II - Off-Line Data Collection</b>                                   | By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure   |
| <b>SMART III - Off-Line Read Scanning</b>                                    | IOEDC: I/O Error Detection Circuitry   |
| <b>Defect Reallocation</b>   | Detects errors in Read/Write buffers on HDD cache RAM  |
| <b>SMART IV - End-to-End CRC for hard drives</b>                             | Interface in F10 setup provides confirmation of SMART IV support.  |

### TEMPERATURE, HUMIDITY, ALTITUDE

|                                    |                      |   |
|------------------------------------|----------------------|---|
| <b>Temperature</b>                 | <b>Operating</b>     | 50° to 104° F (10 to 40° C)                       |
|                                    | <b>Non-operating</b> | -22° to 149° F (-30° to 65° C)                    |
| <b>Humidity</b>                    | <b>Operating</b>     | 5%-95% relative humidity at max inlet temperature |
|                                    | <b>Non Operating</b> | 5%-95% relative humidity at max inlet temperature |
| <b>Shock</b>                       | <b>Operating</b>     | 40g, six surfaces                                 |
|                                    | <b>Non Operating</b> | 30g, six surfaces                                 |
| <b>Vibration</b>                   | <b>Operating</b>     | 2-g peak acceleration                             |
|                                    | <b>Non Operating</b> | 3-g peak acceleration                             |
| <b>Altitude</b><br>(unpressurized) | <b>Operating</b>     | 0 to 10,000 ft (3,048 m)                          |
|                                    | <b>Non-operating</b> | 0 to 30,000 ft (9,144 m)                          |

### Technical Specifications

#### ENVIRONMENTAL & INDUSTRY

##### Environmental Data

###### Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR® certified configurations available
- EPEAT® Silver registered configurations available in the United States. See <http://www.epeat.net> for registration status in your country.

###### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Engage One model is based on a typically configured system featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

#### HP Engage One AiO System Model 141

##### Energy Consumption (in accordance with US ENERGY STAR® test method)

|                               | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|-------------------------------|--------------|--------------|--------------|
| Normal Operation (Short idle) | 12.58W       | 13.07W       | 12.65 W      |
| Normal Operation (Long idle)  | 10.71 W      | 10.96W       | 10.79 W      |
| Sleep                         | 3.28 W       | 3.31W        | 3.26W        |
| Off                           | 1.15W        | 1.18 W       | 1.15 W       |

##### Heat Dissipation\*

|                               | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|-------------------------------|--------------|--------------|--------------|
| Normal Operation (Short idle) | 42.89 BTU/hr | 44.59 BTU/hr | 43.02 BTU/hr |
| Normal Operation (Long idle)  | 36.54 BTU/hr | 37.39 BTU/hr | 36.74 BTU/hr |
| Sleep                         | 11.15 BTU/hr | 11.29 BTU/hr | 11.12 BTU/hr |
| Off                           | 3.92 BTU/hr  | 3.99 BTU/hr  | 3.92 BTU/hr  |

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour

##### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

|                             | Sound Power<br>(L <sub>WAd</sub> , bels) | Sound Pressure<br>(L <sub>pAm</sub> , decibels) |
|-----------------------------|--|---|
| Typically Configured – Idle | 2.7                                      | 17  |
| Fixed Disk – Random writes  | 2.7                                      | 17  |

**NOTE:** Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

#### HP Engage One AiO System Model 143/145

##### Energy Consumption (in accordance with US ENERGY STAR® test method)

|                               | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|-------------------------------|--------------|--------------|--------------|
| Normal Operation (Short idle) | 12.58W       | 13.07W       | 12.65 W      |
| Normal Operation (Long idle)  | 10.71 W      | 10.96W       | 10.79 W      |
| Sleep                         | 3.28 W       | 3.31W        | 3.26W        |
| Off                           | 1.15W        | 1.18 W       | 1.15 W       |

### Technical Specifications

| <b>Heat Dissipation*</b>      | <b>115VAC, 60Hz</b> | <b>230VAC, 50Hz</b> | <b>100VAC, 60Hz</b> |
|-------------------------------|---------------------|---------------------|---------------------|
| Normal Operation (Short idle) | 42.89 BTU/hr        | 44.59 BTU/hr        | 43.02 BTU/hr        |
| Normal Operation (Long idle)  | 36.54 BTU/hr        | 37.39 BTU/hr        | 36.74 BTU/hr        |
| Sleep                         | 11.15 BTU/hr        | 11.29 BTU/hr        | 11.12 BTU/hr        |
| Off                           | 3.92 BTU/hr         | 3.99 BTU/hr         | 3.92 BTU/hr         |

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour

| <b>Declared Noise Emissions<br/>(in accordance with<br/>ISO 7779 and ISO 9296)</b> | <b>Sound Power<br/>(L<sub>WAd</sub>, bels)</b> | <b>Sound Pressure<br/>(L<sub>pAm</sub>, decibels)</b> |
|--|--|---|
| Typically Configured – Idle  | 2.7  | 17  |
| Fixed Disk – Random writes   | 2.7  | 17  |

### Technical Specifications

#### Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 2 memory slots
- M.2 2230 slot for WLAN
- (1) M.2 2280 slot for SSD
- (4) USB Ports (2 – USB 2.0; 2 – USB 3.0) Plug in ports for 2 bases

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680.1 (EPEAT) standard at the <Silver> level, see [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 45.16% post-consumer recycled plastic (by wt.)
- This product is 96% recycle-able when properly disposed of at end of life.
- EMC Compliant: IEC 60601-1-2

#### Packaging Materials

|                  |   |        |
|------------------|---|--------|
| <b>External:</b> | PAPER/Corrugated                        | 1380 g |
| <b>Internal:</b> | PLASTIC/Polyethylene Expanded - EPE     | 534 g  |
|                  | PLASTIC/Polyethylene low density – LDPE | 22 g   |

The EPE foam packaging material is made from 0% recycled content.

The corrugated paper packaging materials contains at least 25% recycled content.

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds

### Technical Specifications

- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### End-of-life Management and Recycling

HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the HP Inc. web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### HP Inc. Corporate Environmental Information

For more information about HP's commitment to the environment

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

[PC Product Design ISO 14001 certificate](#)

and

[HP Operations ISO 14001 certificate](#)

---

## SERVICE AND SUPPORT

### Technical Specifications

Ninety-day (90-90-90), one-year (1-1-1), and three-year (3-3-3) limited warranty delivers (ninety days/one year/three years) of on-site, next business day<sup>2</sup> service for parts and labor and complimentary limited technical support.<sup>3</sup> Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing an optional HP Care Pack.<sup>1</sup> To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>

#### NOTES:

1. Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.
  2. On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
  3. Technical support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. 24 x 7 support may not be available in some countries.
-



### HP Engage One Peripherals

#### HP USB-C Mini Dock



#### Models

|  |             |
|--|-------------|
| HP USB-C Mini Dock                       | 1PM64AA     |
| HP USB C Mini Dock + 90W Adapter + PC EU | 3PR57AA#ABB |
| HP USB C Mini Dock + 90W Adapter + PC HE | 3PR57AA#ABT |
| HP USB C Mini Dock + 90W Adapter + PC UK | 3PR57AA#ABU |
| HP USB C Mini Dock + 90W Adapter + PC DE | 3PR57AA#ABY |
| HP USB C Mini Dock + 90W Adapter + PC SA | 3PR57AA#ACQ |
| HP USB C Mini Dock + 90W Adapter + PC US | 3PR57AA#ABA |
| 90W AC Adapter                           | 2LN85AA     |

|                                       |                                 |  |
|---------------------------------------|---------------------------------|--|
| <b>General</b>                        | <b>Ports</b>                    | 1 USB-C™ charging/data port<br>2 USB ports (1 USB 3.0, 1 USB 2.0)<br>1 Ethernet port (10/100/1000)<br>1 VGA port<br>1 HDMI |
|                                       | <b>Weight</b>                   | .29 lb (0.132 kg)  |
|                                       | <b>Video resolution</b>         | Only single display supported<br>HDMI: 4096 x 2160 @ 30Hz<br>VGA: 1920 x 1080  |
| <b>Stand-alone power requirements</b> | <b>Normal Operating Voltage</b> | 5V   |
|                                       | <b>Average Operating Power</b>  | 12W  |
|                                       | <b>Max Operating Power</b>      | 15W  |
| <b>Temperature</b>                    | <b>Operating</b>                | 32~104 °F (0~40 °C)  |
|                                       | <b>Non-operating</b>            | -4~140 °F (-20~+60 °C)   |
| <b>Relative humidity</b>              | <b>Operating</b>                | 5%~90% RH, non-condensing  |
|                                       | <b>Non-operating</b>            | 5%~95% RH, non-condensing  |
| <b>Altitude</b>                       | <b>Operating</b>                | 10000 ft. (3048 m) @2 hours  |
|                                       | <b>Non-operating</b>            | 30000 ft. (9144 m) @ 2 hours   |
| <b>Shock</b>                          | <b>Operating</b>                | 40G, 2ms, half-sine  |

### HP Engage One Peripherals

|                              |   |                                    |
|------------------------------|---|------------------------------------|
| <b>Random vibration</b>      | <b>Non-operating</b>  | 240G, 2ms, half-sine               |
|                              | <b>Operating</b>  | ~2.09Grms, 5-500 Hz, Non-Operating |
|                              | <b>Non-operating</b>  | ~2.09Grms, 5-500 Hz, Non-Operating |
| <b>Network manageability</b> | PXE Boot;   |                                    |
|                              | Wake On Lan (WoL)   |                                    |
|                              | <b>NOTE:</b> your computer might support WoL Through from the Off, Sleep or Hibernation States, or only when the computer is On or in Sleep.  |                                    |
|                              | MAC Address Pass Through  |                                    |
|                              | <b>NOTE:</b> your computer might support MAC Address Pass Through from the On, Off, Sleep or Hibernation States, or only when the computer is On or in Sleep, Supported for UEFI PXE Boot); |                                    |
| <b>Power Delivery (PD)</b>   | WLAN – LAN switching  |                                    |
|                              | <b>NOTE:</b> supported only on select computers running Windows 10 operating system.  |                                    |
|                              | USB-C PD 3.0 supporting 90W USB-C AC Adapters (not included)<br>- 90W USB-C AC Adapter supports 20V/3A  |                                    |
| <b>Option Kit Contents</b>   | HP USB-C Mini Dock, Documentation   |                                    |

---

### HP Engage One Peripherals

### HP Engage One 2D Barcode Scanner



### Model

HP Engage One 2D Barcode Scanner (Black)  
HP Engage One 2D Barcode Scanner (White)

1RL97AA  
3GS20AA

### General

|                                 |   |
|---------------------------------|---|
| <b>Scanner Type</b>             | 2D Imager   |
| <b>Light source</b>             | White LED   |
| <b>Read Rate</b>                | 30 frames/seconds   |
| <b>Nominal working distance</b> | Depth of Field<br>Minimum distance determined by symbol length and scan angle.<br>Printing resolution, contrast, and ambient light dependent. |

#### Typical Performance \*

| Narrow Width    | Depth of Field               |
|-----------------|------------------------------|
| 10 mil Code 39  | 27.94-330.2 mm (1.1-13.0")   |
| 10 mil Code 128 | 27.94-330.2 mm (1.1-13.0")   |
| 100% UPC-A      | 45.72-419.1 mm (1.8-16.5")   |
| 10 mil Aztec    | 53.34-203.2 mm (2.1-8.0")    |
| 6.7 mil PDF 417 | 45.72-182.88 mm (1.8 - 7.2") |
| 10 mil DM**     | 53.34-203.2 mm (2.1 - 8.0")  |

### HP Engage One Peripherals

\* Performance may be impacted by bar code quality and environmental conditions

\*\* Data Matrix (DM)

|                              |  |
|------------------------------|--|
| <b>Symbol Contrast</b>       | 35% minimum reflectance difference   |
| <b>Roll (tilt)</b>           | ± 360°   |
| <b>Pitch</b>                 | ± 60°  |
| <b>Skew</b>                  | ± 70°  |
| <b>1D decode symbologies</b> | UPC/EAN (A)<br>UPC/EAN (E)<br>UPC/EAN/ ( 13)<br>UPC/EAN ( 8)<br>Code 39 (Regular)<br>Code 128<br>EAN 128<br>Code 93<br>GS1 Databar Omnidirectional<br>GS1 DataBar Stacked<br>GS1 DataBar Truncated<br>GS1 Databar Expanded<br>UPC/EAN/JAN (ISBN )<br>UPC/EAN/JAN (Bookland )<br>UPC/EAN/JAN ( ISSN)<br>ISSN - 2<br>EAN 13/P2 (with 2 digits Add-On)<br>EAN 13/P5 (with 5 digits Add-On)<br>Code 39 (including full ASCII)<br>Code39 CIP (French Pharmaceutical)<br>Code 39 (trioptic)<br>LOGMARS (Code 39 w/ standard check digit enabled)<br>Code 32 (Italian Pharmacode 39)<br>Interleaved 2 of 5<br>Standard 2of 5<br>Industrial 2 of 5<br>Code 11 (with two check digits)<br>Code 11 (with one check digit)<br>Codabar<br>MSI<br>PZN - code 39<br>GS1 DataBar Limited<br>Codablock F |
| <b>2D decode symbologies</b> | Datamatrix<br>QR Codes (QR, Micro QR and Multiple QR Codes)<br>PDF-417<br>Aztec<br>Maxicode<br>Micro PDF417<br>Datamatrix (2D inversed)<br>Chinese Sensible Code<br>GS1 DataBar Stacked Omni-directional<br>GS1 DataBar Expanded Stacked<br>Postal Codes<br>Australian<br>Japanese   |

### HP Engage One Peripherals

Planet  
Postnet  
Royal Mail

#### Mechanical

|                               |  |
|-------------------------------|--|
| <b>Dimensions (L x W x H)</b> | 125 x 44 x 76.8 mm (4.92 x 1.73 x 3.02 in) |
| <b>Weight</b>                 | 130 g (4.59 oz)                            |
| <b>Cable length</b>           | 2m   |
| <b>Color</b>                  | Ebony Black or Ceramic White               |

#### Interface/Connection

|              |     |
|--------------|-----|
| <b>Cable</b> | USB |
|--------------|-----|

#### Temperature

|                                  |                              |
|----------------------------------|------------------------------|
| <b>Operating</b>                 | 32°F to 122°F (0°C to 50°C)  |
| <b>While Charging</b>            | 32°F to 104°F (0°C to 40°C)  |
| <b>Storage/transport</b>         | -40 to 158 °F (-40 to 70 °C) |
| <b>Humidity (non-condensing)</b> | 0 to 95% relative humidity   |

#### Power

|                      |                               |
|----------------------|-------------------------------|
| <b>Idle Current</b>  | Standby/Idle (Typical):< 70mA |
| <b>Input Voltage</b> | 5V, 500mA                     |

#### Drivers

Windows USB COM, OPOS, and JPOS

#### Operating System

|                         |  |
|-------------------------|--|
| <b>Compatible with:</b> | <b>Windows</b><br>Windows 10 IoT Enterprise for Retail (64-bit)<br>Windows 10 Pro (64-bit)   |
|                         | <b>Linux</b><br>Red Hat/Cento 6 and 7 (32-bit and 64-bit)<br>Suse Linux® Enterprise POS 11 SP3 (32-bit and 64-bit)<br>Ubuntu 14.04 LTS (32-bit and 64-bit) |

#### Agency Certifications

C-Tick, KCC, BSMI, VCCI, CSA, CE, FCC

#### Option Kit Contents

HP Engage One 2D Barcode Scanner with attached 6.5 ft (2M) USB cable, Scanner Stand.

### HP Engage One Peripherals

#### HP Engage One Fingerprint Reader



#### Models

HP Engage One Fingerprint Reader (Black)

1RL98AA

|                             |   |   |
|-----------------------------|---|---|
| <b>Model</b>                | <b>HP Engage One Fingerprint Reader</b> | 1RL98AA                                     |
| <b>General</b>              | <b>Scan Data</b>                        | 8-bit grayscale (256 levels of gray)        |
|                             | <b>Pixel resolution</b>                 | 508 DPI                                     |
|                             | <b>Scan capture area</b>                | 18mm x 1280mm                               |
| <b>Mechanical</b>           | <b>Standalone Dimensions(LxWxH)</b>     | 162 x 30 x 20.7 (mm) (6.38 x 1.18 x .81 in) |
|                             | <b>Attached Dimensions (LxWxH)</b>      | 162x30 x29.2 (mm) (6.38 x 1.18 x 1.15 in)   |
|                             | <b>Standalone Weight</b>                | 79g (2.79 oz)                               |
|                             | <b>Attached Weight</b>                  | 116g (4.09 oz)                              |
| <b>Interface/Connection</b> | <b>Color</b>                            | Ebony Black                                 |
|                             | <b>Interface</b>                        | USB 2.0                                     |
| <b>Power</b>                | <b>Supply Voltage</b>                   | 5.0V ±5% supplied by USB                    |

### HP Engage One Peripherals

|                          |                                    |  |
|--------------------------|------------------------------------|--|
|                          | <b>Supply Current Imaging Mode</b> | 80 mA @ 3.3V   |
|                          | <b>Supply Current Sleep Mode</b>   | 1350 uA @ 3.3V   |
| <b>Environmental</b>     | <b>Temperature</b>                 | - 20 C to + 70 C   |
|                          | <b>Humidity</b>                    | 5% to 93% RH w/o condensation  |
| <b>Drivers</b>           |                                    | Windows  |
| <b>Operating Systems</b> | <b>Compatibility</b>               | <b>Windows</b><br>Windows 10 IoT Enterprise for Retail 64-bit*, ***<br>Windows 10 Professional 64-bit*, ***<br>Windows 8.1 Professional 64-bit**<br>Windows Industry 8.1 Pro Retail 64-bit**<br>Windows 7 Professional 64-bit**<br>Windows 7 Professional 32-bit**<br>Windows Embedded POSReady 7 64-bit**<br>Windows Embedded POSReady 7 32-bit** |
|                          |                                    | <b>Linux</b><br>Ubuntu 12.04<br>Ubuntu 13.04<br>Ubuntu 14.04   |

|                    |                        |  |
|--------------------|------------------------|--|
| <b>Reliability</b> | <b>Surface Coating</b> | Scratch Resistant<br>Withstands more than 4 million rubs   |
|                    | <b>Readability</b>     | More than 100,000 read/write cycle<br>More than 20 yrs data retention<br>Works well with dry, moist, or rough fingerprints |
|                    | <b>Security</b>        | Counterfeit Finger Rejection<br>Latent Print Rejection<br>Encryption Fingerprint Data                                      |

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>

\*\* Not all features are available in all editions of Windows. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows functionality. See <http://www.microsoft.com>.

\*\*\* Full support on all x86-based Windows, NO current support drivers for ARM processor platforms.

### HP Engage One Peripherals

#### HP Engage One Top Mount 2x20 CFD



#### Models

HP Engage One Top Mount 2x20 CFD (Black)

1RL95AA

HP Engage One Top Mount 2x20 CFD (White)

3GS18AA

#### General

|                              |  |
|------------------------------|--|
| <b>Display Type</b>          | TFT LCD                                    |
| <b>Resolution</b>            | 480(W) x 3(GB) x 64(H) Pixel Dots          |
| <b>Average Brightness</b>    | 600 cd/m <sup>2</sup>                      |
| <b>Display Mode</b>          | Alphanumeric: 20 digits x 2 lines          |
| <b>Character Dot Matrix</b>  | 24x32 dots for 20 x 2                      |
| <b>Dot Size (X *Y)</b>       | 0.279 (W) x 0.281 (H) mm                   |
| <b>Character Type</b>        | Alphanumeric and Compound (2-Bytes) Words  |
| <b>Character Size</b>        | 9.0 (H) mm x 6.7 (W) mm                    |
| <b>User Define Character</b> | 96 characters                              |
| <b>Language</b>              | <b>Compound (2-Bytes Words):</b><br>Arabic |



### HP Engage One Peripherals

Japanese  
Korean  
Persian  
Simplified Chinese  
Traditional Chinese

**Alphanumeric:**

Bosnian  
Croatian  
Czech  
Danish  
Dutch  
English (US)  
Estonian  
Faroese  
Finnish  
Flemish  
French  
French Canadian  
German  
Greek  
Hebrew  
Hungarian  
Icelandic  
Indonesian  
International English  
Irish  
Italian  
Katakana  
Latvian  
Lithuanian  
Norwegian  
Polish  
Portuguese  
Romanian  
Russian  
Slovak  
Slovene  
Spanish  
Swedish  
Turkish

**Viewing Direction** 12 O'clock : Customer application  
6 O'clock: Gray scale inversion

**Viewing Area** 135.28 (W) \* 19.0 (L)

**Viewing Angle**  
 $\theta_L \phi = 180^\circ$  (9 o'clock) 70 degree  
 $\theta_R \phi = 0^\circ$  (3 o'clock) 70 degree  
 $\theta_T \phi = 90^\circ$  (12 o'clock) 50 degree  
 $\theta_B \phi = 270^\circ$  (6 o'clock) 70 degree

**Command Modes** ADM788, AEDEX, CD5520, DSP880, EMAX, Epson, LD540, Logic Control, UTC/P / UTC/S

**Mechanical**

**Product Dimensions** 157.47 (W) x 34.47 (H) x 12.9 (D) mm (6.2 x 1.36 x .51 in) (metal bracket for inserting to platform excluded)

**Panel Dimensions** 148.9 (W) x 29.1 (L) x 3.35 (H) (5.86 x 1.15 x .132 in)

**Net Weight** Approx. 110 grams (3.88 oz)

### HP Engage One Peripherals

|  |                                      |   |
|--|--------------------------------------|---|
|  | <b>Color</b>                         | Ebony Black or Ceramic White  |
| <b>Interface/Connection</b>                | <b>Interface</b>                     | USB   |
|  | <b>Baud Rate</b>                     | Direct connection 9600  |
| <b>Power</b>                               | <b>Voltage (typical)</b>             | 5VDC +/-10%   |
|  | <b>Current consumption (typical)</b> | 400mA   |
| <b>Reliability</b>                         | <b>MTBF</b>                          | 30,000 hours  |
| <b>Operating Systems (Compatible with)</b> | <b>Windows</b>                       | Windows 10 IoT Enterprise for Retail (64-bit)*<br>Windows 10 Pro (64-bit)*  |
|  | <b>Linux</b>                         | Red Hat/CentOS 6 and 7 (32-bit and 64-bit)<br>Suse Linux® Enterprise POS 11 SP3 (32-bit and 64-bit)<br>Ubuntu 14.04 LTS (32-bit and 64-bit) |
| <b>Drivers</b>                             |                                      | Windows USB COM, OPOS, JPOS   |
| <b>Certifications</b>                      |                                      | FCC, CE, VCCI, RCM, KCC, ICE, CSA, EAC  |
| <b>Kit Contents</b>                        |                                      | HP Engage One Top Mount 2x20 CFD, 2 screws  |

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.

\*\*Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. See <http://www.microsoft.com>.

### HP Engage One Peripherals

#### HP Engage One Column Thermal Printer G2



#### Model

HP Engage One Column Thermal Printer G2

Configurable option only in black. Not available as after-market option.

#### Introduction

The Engage One Column Thermal Printer G2 features a unique, save-saving column design. It offers a faster speed and a more robust design vs. its predecessor. It is a configurable option only.

#### Key Features and Benefits

- Unique space-saving design
- Print speed up to 200 mm/ sec, improved gen-over-gen
- Robust set of supported character sets/ resident code pages and barcodes
- Available as a configurable-to-order option
- Not available as an after-market option
- Available in black only

### HP Engage One Peripherals

---

#### **Service and Support**

Three-(3) year limited warranty with advance exchange when purchased from HP.

### HP Engage One Peripherals

#### General

#### Supported Character Sets/ Resident Code

##### Pages

290 (Japanese Katakana Extended)

437 (US, Standard Europe)

720 (Arabic)

737 (Greek)

850 (Multilingual Latin I)

852 (Latin II)

855 (Cyrillic)

857 (Turkish)

858 (Multilingual I + Euro)

860 (Portuguese)

862 (Hebrew)

863 (Canadian/French)

864 (Arabic)

865 (Nordic)

866 (Russian)

932 (Japanese Shift JIS)

936 (Simplified Chinese)

949 (Korean)

950 (Traditional Chinese)

1125 (Ukrainian)

1250 (Central Europe)

1251 (Cyrillic)

1252 (Windows Latin I)

1253 (Greek)

1254 (Turkish)

1255 (Hebrew)

1256 (Arabic)

1257 (Baltic)

1258 (Vietnamese)

ISO8859-2 (Latin 2)

KU42 (Thai)

Unicode support for resident fonts/ Code Pages

#### Bar Codes

**1D:** UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Interleaved 2 of 5  
Codabar, Code 128, Code 128, EAN 128, GS1 Databar

**2D:** Datamatrix, QR code, PDF 417

#### Print Method

Direct Thermal

#### Printing Speed

Up to 200 mm/sec throughput monochrome

#### Printer Sensor

Paper presence

#### Resolution

203 dpi (8-dots/mm)

#### Print Width

72 mm with 80 mm paper roll

#### Flash Memory

8 MB

#### RAM

8 MB

#### Knife

Full and Partial cuts supported

#### Receipt-Columns

44/56

### HP Engage One Peripherals

|                              |                                |   |
|------------------------------|--------------------------------|---|
|                              | <b>Paper Type</b>              | Thermal paper   |
|                              | <b>Paper Loading</b>           | Drop-in   |
|                              | <b>Paper Thickness Range</b>   | 2.3–3.2 mils (60–82 µm)   |
|                              | <b>Roll Core Diameter</b>      | 25 mm   |
|                              | <b>External Paper Diameter</b> | 51 mm max   |
|                              | <b>Cash Drawers</b>            | One connector can drive two cash drawers with separately purchased splitter cable (default configuration is connection to one cash drawer)  |
| <b>Mechanical</b>            | <b>Dimensions</b>              | (LxWxH): 3.8 in x 3.8 in x 10.3 in (96 mm x 96 mm x 262 mm)   |
|                              | <b>Weight</b>                  | 4.0 lb (1.8 kg)   |
|                              | <b>Color</b>                   | Ebony Black   |
| <b>Interface/Connection</b>  | <b>Interface</b>               | Standard USB 2.0 type A to type B mini<br>24V cash drawer support with RJ12 interface   |
| <b>Power</b>                 | <b>External Power Supply</b>   | 60 w  |
|                              | <b>Operating Voltage</b>       | 24 V  |
|                              | <b>Typical Current</b>         | 1.1 A   |
|                              | <b>Idle Current</b>            | 25mA  |
| <b>Temperature Range</b>     | <b>Operating</b>               | 50°F to 104°F (10°C to 40°C) at 20% to 85% humidity   |
|                              | <b>Non-operating</b>           | 22°F to 149°F (-30°C to 65°C) at 5% to 90% humidity   |
| <b>Drivers</b>               |                                | Windows, OPOS, JPOS   |
| <b>Operating Systems</b>     | <b>Windows</b>                 | <ul style="list-style-type: none"> <li>• Windows 11 Pro 64-bit</li> <li>• Windows 10 Pro 64-bit</li> <li>• Windows 10 IoT Enterprise 2019 LTSC 64-bit (RS5-based)</li> <li>• Windows 10 IoT Enterprise 2016 LTSC 64-bit (RS1-based)</li> </ul>  |
|                              | <b>Linux</b>                   | <ul style="list-style-type: none"> <li>• CentOS: 8.4.2105-x86_64</li> <li>• Fedora: Workstation-Live-x86_64-34-1.2</li> <li>• OpenSUSE: Leap-15.3-DVD-x86_64</li> <li>• SUSE Linux: 12-SP5-Server-DVD-x86_64-GM-DVD1, SUSE Linux-15-SP2-Full-x86_64, SUSE Linux 15-SP3-Full-x86_64</li> <li>• Ubuntu 18.04.05-desktop-amd64, ubuntu-20.04.2.0-desktop-amd64, ubuntu-mate-20.04.2.0-desktop-amd64</li> </ul> |
| <b>Reliability</b>           | <b>MCBF Knife Cuts:</b>        | 1-million   |
|                              | <b>Print Head Life:</b>        | 100 km  |
| <b>Agency Certifications</b> | <b>Safety</b>                  | UL 62368-1<br>CAN/ CSA C22.2 No. 62368-1<br>IEC/ EN 62382-1 2nd Edition GB4943.1-2011-China<br>IS 13252-1 (2010)/A1:2013/A2:2015  |
|                              | <b>Radiated Emissions:</b>     | FCC 47CFR, Part 15, Class B ICES-003: 2012, Issue 6, Class B EN 55032:2015 Class B  |

### HP Engage One Peripherals

CISPR22 Class B

VCCI: V-3/2015.04 Class B AS/ NZS 3548

**Immunity:**

EN55035

EN61000-4-2 Level 4 (8kV direct, 15kV air discharge) EN61000-4-3: Level 3 (10V/m)

EN61000-4-6 Level 3 (10V rms)

EN61000-4-4: Level 3 (2kV mains, 1kV data lines) RoHS, WEEE

**NOTE:** This printer does not comply with fiscalization requirements that may be required in certain countries.

### HP Engage One MSR



### HP Engage One Peripherals

#### Models

HP Engage One MSR

Configurable option only in black or white. Not available as after-market option.

|                              |                                      |  |
|------------------------------|--------------------------------------|--|
| <b>General</b>               | <b>Magnetic stripe formats</b>       | ISO 7811, AAMVA  |
|                              | <b>Type</b>                          | Singe-head, bi-directional, 3-Track, encryption capable  |
|                              | <b>Card thickness</b>                | 0.015 to 0.045 in (0.38 to 1.14 mm)  |
|                              | <b>Indicators</b>                    | Bi-colored LED, beeper (requires system audio driver)  |
| <b>Mechanical</b>            | <b>Slot width</b>                    | 0.045 in (1.14 mm)   |
|                              | <b>Color</b>                         | Ebony Black or Ceramic White   |
| <b>Interface/Connection</b>  | <b>Connection</b>                    | Integrated directly into head unit.  |
| <b>Power</b>                 | <b>Voltage (typical)</b>             | 5 VDC +/- 10%, 50mV ripple max   |
|                              | <b>Current consumption (typical)</b> | 40mA max   |
| <b>Drivers</b>               | Windows native, OPOS, JPOS           |  |
| <b>Operating Systems</b>     | <b>Compatibility</b>                 | <b>Windows</b><br>Windows 10 IoT Enterprise for Retail (64-bit)*,***<br>Windows 10 Pro (64-bit)*,*** |
| <b>Temperature Range</b>     | <b>Operational</b>                   | 0° C to 55° C  |
|                              | <b>Relative Humidity</b>             | 90% (non-condensing)   |
| <b>Reliability</b>           | <b>Operating Life</b>                | 1,000,000 card swipes minimum  |
| <b>Agency Certifications</b> | FCC, CE, USB-IF                      |  |
| <b>Country of Origin</b>     | Taiwan                               |  |

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>

\*\* Not all features are available in all editions of Windows. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows functionality. See <http://www.microsoft.com>.


\*\*\* Full support on all x86-based Windows, NO current support drivers for ARM processor platforms.

\*\*\*\* The MSR designed into the Engage One terminal has an optional encryption functionality. HP has partnered with IDTECH Products to perform key injection services remotley. For more information about their service, contact the IDTECH Product sales team at [Sales@idtechproducts.com](mailto:Sales@idtechproducts.com).



### HP Engage One Peripherals

#### HP Engage One 10.1" Touch Display

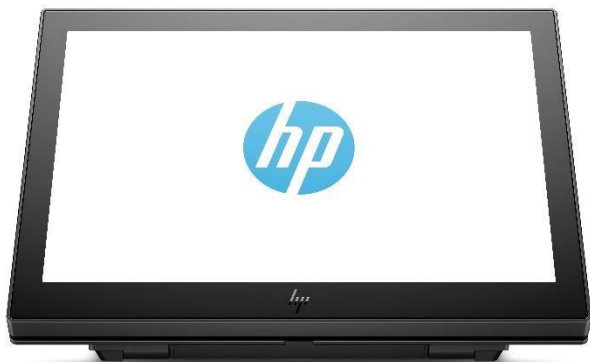

---

#### Models

HP Engage One 10.1 in Touch Display (Black)

1XD81AA

HP Engage One 10.1 in Touch Display (White)

3FH67AA

---

**General**

**Display Size (diagonal)** 10.1 in

### HP Engage One Peripherals

|  |   |
|--|---|
| <b>Display Type</b>                                | IPS w/LED backlight                               |
| <b>Color</b>                                       | Ebony Black or Ceramic White                      |
| <b>Input Connectors</b>                            | USB-C (Upstream) ( 5 Gbits/sec, 5V/3A, Alt mode ) |
| <b>Native Resolution</b>                           | 1280 x 800 @ 60 Hz                                |
| <b>Aspect Ratio</b>                                | 16:10   |
| <b>Brightness</b>                                  | 500 cd/m <sup>2</sup>                             |
| <b>Static Contrast Ratio - Typical</b>             | 800:1   |
| <b>Dynamic Contrast Ratio (DCR)</b>                | N/A   |
| <b>Pixel Pitch</b>                                 | 0.1695 (H) x 0.1695 mm(V)                         |
| <b>Pixels Per Inch (PPI)</b>                       | 149   |
| <b>Backlight Lamp Life</b>                         | 50k minimum                                       |
| <b>Anti-Glare Panel</b>                            | Yes   |
| <b>BrightView Panel</b>                            | No  |
| <b>Response Time</b>                               | 25ms  |
| <b>Color Gamut</b>                                 | 45%   |
| <b>Color Support</b>                               | Up to up to 16.1 million colors                   |
| <b>Horizontal Viewing Angle (typical CR&gt;10)</b> | 170°  |
| <b>Vertical Viewing Angle (typical CR&gt;10)</b>   | 170°  |
| <b>3D Vertical Viewing Angle</b>                   | N/A   |

### HP Engage One Peripherals

**Panel Active Area** 216.96 (H) x 135.60 (V)

**Preset Graphic Modes/Supported Resolutions**  
 640 x 480 @ 60Hz  
 800 x 600 @ 60 Hz  
 1024 x 768 @ 60 Hz  
 1280 x 720 @ 60 Hz  
 1280 x 800 @ 60 Hz

**Maximum Resolution** 1280 x 800@ 60 Hz

**Recommended Resolution** 1280 x 800 @ 60 Hz

**Vertical Scan Range** 50 - 60 Hz

**Horizontal Scan Range** 30~54 kHz

**Default Color Temperature** Neutral (6500)

**Maximum Pixel Clock Speed** 110 MHz

**Exterior Color of Monitor Bezel and Stand** Black in bezel and hinge

**Plug & Play** Yes

**Tilt** 15 to + 90 degrees

**Swivel** No

**Pivot** No

**Security Lock Ready** No

**Height Adjustment** No

**Height Adjustment Range (Min-Max)** N/A

**Detachable Base** No

**Warranty** 3/3/0 : WW

**Webcam** N/A

**Speakers Output Power** N/A

**VESA Mounting** Yes

**Touch Specifications** **Touch Panel Type** Projective Capacitive 5 point

**Positional Accuracy** AA : ±0.1mm  
 VA : ±1.5mm

**Resolution Accuracy** 16384\*9600

### HP Engage One Peripherals

|                                    |   |   |
|------------------------------------|---|---|
|                                    | <b>Optical Light Transmission (per ASTM D1003)</b>    | Normal Glass: T% $\geq$ 85%   |
|                                    | <b>Electrostatic Projection (pr EN6100-4-2, 1955)</b> | IC : Air +/- 8 KV   |
| <b>On Screen Display (OSD)</b>     | <b>On Screen Display User Controls</b>                | Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, Menu Control, Management, Language, Information, Exit |
|                                    | <b>User Programmable Modes</b>                        | Yes, 10   |
|                                    | <b>Monitor Control Buttons or Switches</b>            | Menu/OK, Minus button/Down/Information, Plus button/Up/Color Control, Exit/Back/Brightness, Power                                       |
|                                    | <b>Audio Controls</b>                                 | N/A   |
|                                    | <b>Languages</b>                                      | 10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)                              |
| <b>Power</b>                       | <b>Power Supply</b>                                   | No  |
|                                    | <b>Power Source</b>                                   | USB-C 5V/3A,15W   |
|                                    | <b>Power Consumption - Maximum</b>                    | 15w   |
|                                    | <b>Energy Saving/Standby Mode</b>                     | 0.5w  |
|                                    | <b>Power Consumption - Typical</b>                    | 12w   |
|                                    | <b>Power Cable Length</b>                             | N/A   |
|                                    | <b>Operational Mode at 100 VAC</b>                    | 20.72KHw/year   |
| <b>Operational Mode at 115 VAC</b> | 20.72KHw/year   |   |
| <b>Operational Mode at 230 VAC</b> | 20.72KHw/year   |   |
| <b>Operating Conditions</b>        | <b>Operating Temperature</b>                          | 5° - 35°C<br>41° - 95°F   |
|                                    | <b>Non-operating Temperature</b>                      | - 20° - 60°C<br>29° - 140°F   |
|                                    | <b>Operating Humidity</b>                             | 20% - 80% (non-condensing)  |
|                                    | <b>Non-operating Humidity</b>                         | 5% - 95%  |
|                                    | <b>Operating Altitude</b>                             | 0 - 5,000 m (16,400 ft.)  |
|                                    | <b>Non-operating Altitude</b>                         | 0 - 12.192 m (40,000 ft.)   |

### HP Engage One Peripherals

|  |   |   |                                    |
|--|---|---|------------------------------------|
| <b>Dimensions</b>                                | <b>Unpacked without stand</b>                           | 9.69 x 6.07 x 1.38 in<br>24.62 x 17.02 x 3.52cm   |                                    |
|  | <b>Packed</b>   | 12.05 x 4.33 x 9.13 in<br>30.6 x 11 x 23.2cm  |                                    |
|  | <b>Display Head Dimensions (Unpacked without stand)</b> | 9.69 x 6.07 x 0.59 in<br>24.62 x 17.02 x 1.5cm  |                                    |
|  | <b>Base Area Footprint</b>                              | 4.72 x 7.09in<br>119.98 x 179.97mm  |                                    |
|  | <b>Bezel Measurements</b>                               | top 0.063 in, side 0.063 in, bottom 0.063in<br>top 1.6 mm, side 1.6mm, bottom 1.6 mm  |                                    |
|  | <b>Weight (unpacked with stand)</b>                     | 3.3lb (1.49kg)  |                                    |
|  | <b>Weight (packed)</b>                                  | 4.26lb(single pack) 1.93kg(single pack)<br>23.51lb(bulk pack) 10.67kg(bulk pack)  |                                    |
|  | <b>Environmental</b>                                    | <b>Mercury-free display backlighting</b>  | Yes, Mercury-free LED backlighting |
|  |   | <b>Arsenic-Free Display Glass</b>   | Yes                                |
|  |   | <b>Low Halogen</b>  | Yes                                |
| <b>Agency Approvals and Certifications</b>       |   | WW application<br>CE/CB/MSIP/Mexico CoC/ICES/ISO 9241-307/ EAC/cTUVus/CCC/TUV-Barunt<br>/VCCI/FCC/RCM/BSMI/WEEE/Ukraine/Morocco |                                    |
| <b>Microsoft WHQL Certification</b>              |   | Win-7, 8, 10  |                                    |
| <b>China Energy Label</b>                        |   | N/A   |                                    |
| <b>TCO Certified Edge</b>                        |   | No  |                                    |
| <b>TCO Certified</b>                             |   | No  |                                    |
| <b>SmartWay Transport Partnership</b>            |   | Yes (NA SKU)  |                                    |
| <b>Contains Recycled Plastics in Back Cover</b>  |   | 85%   |                                    |
| <b>Contains Recycled Plastics in Base/Stand</b>  | 85%   |   |                                    |
| <b>Contains Recycled Plastics in Other Parts</b> | 85% (Deco, Middle Frame)                                |   |                                    |
| <b>Recyclable Plastics</b>                       | All   |   |                                    |
| <b>Recyclable Packaging</b>                      | All   |   |                                    |
| <b>Software</b>                                  | N/A   |   |                                    |
| <b>What's in the Box</b>                         | Captive USB TYPE C cable (1.8m) and stand (15 to +90°)  |   |                                    |
| <b>Options</b>                                   | The Engage One POS VESA Plate – 2WY48AA                 |   |                                    |


### HP Engage One Peripherals

**Country of Origin**      China

---

### HP Engage One Peripherals

#### HP Engage One 10.1" Display

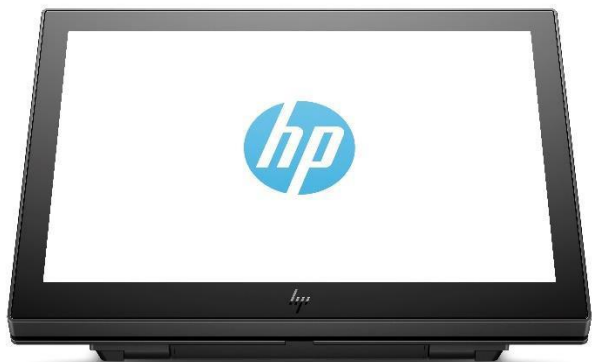

### Models

HP Engage One 10.1 in Display (Black)

1XD80AA

HP Engage One 10.1 in Display (White)

3FH66AA

### General

**Display Size (diagonal)** 10.1 in

**Display Type** IPS w/LED backlight

### HP Engage One Peripherals

|  |   |
|--|---|
| <b>Color</b>                                       | Ebony Black or Ceramic White                      |
| <b>Input Connectors</b>                            | USB-C (Upstream) ( 5 Gbits/sec, 5V/3A, Alt mode ) |
| <b>Native Resolution</b>                           | 1280 x 800 @ 60 Hz                                |
| <b>Aspect Ratio</b>                                | 16:10   |
| <b>Brightness</b>                                  | 500 cd/m <sup>2</sup>                             |
| <b>Static Contrast Ratio - Typical</b>             | 800:1   |
| <b>Dynamic Contrast Ratio (DCR)</b>                | N/A   |
| <b>Pixel Pitch</b>                                 | 0.1695 (H) x 0.1695 mm(V)                         |
| <b>Pixels Per Inch (PPI)</b>                       | 149   |
| <b>Backlight Lamp Life</b>                         | 50k minimum                                       |
| <b>Anti-Glare Panel</b>                            | Yes   |
| <b>BrightView Panel</b>                            | No  |
| <b>Response Time</b>                               | 25ms  |
| <b>Color Gamut</b>                                 | 45%   |
| <b>Color Support</b>                               | Up to up to 16.1 million colors                   |
| <b>Horizontal Viewing Angle (typical CR&gt;10)</b> | 170°  |
| <b>Vertical Viewing Angle (typical CR&gt;10)</b>   | 170°  |
| <b>3D Vertical Viewing Angle</b>                   | N/A   |
| <b>Panel Active Area</b>                           | 216.96 (H) x 135.60 (V)                           |



### HP Engage One Peripherals

|  |   |
|--|---|
| <b>Preset Graphic Modes/Supported Resolutions</b>  | 640 x 480 @ 60Hz<br>800 x 600 @ 60 Hz<br>1024 x 768 @ 60 Hz<br>1280 x 720 @ 60 Hz<br>1280 x 800 @ 60 Hz   |
| <b>Maximum Resolution</b>  | 1280 x 800@ 60 Hz   |
| <b>Recommended Resolution</b>  | 1280 x 800 @ 60 Hz  |
| <b>Vertical Scan Range</b>   | 50 - 60 Hz  |
| <b>Horizontal Scan Range</b>   | 30~54 kHz   |
| <b>Default Color Temperature</b>   | Neutral (6500)  |
| <b>Maximum Pixel Clock Speed</b>   | 110 MHz   |
| <b>Exterior Color of Monitor Bezel and Stand</b>   | Black in bezel and hinge  |
| <b>Plug &amp; Play</b>   | Yes   |
| <b>Tilt</b>  | 15 to + 90 degrees  |
| <b>Swivel</b>  | No  |
| <b>Pivot</b>   | No  |
| <b>Security Lock Ready</b>   | No  |
| <b>Height Adjustment</b>   | No  |
| <b>Height Adjustment Range (Min-Max)</b>   | N/A   |
| <b>Detachable Base</b>   | No  |
| <b>Warranty</b>  | 3/3/0 : WW  |
| <b>Webcam</b>  | N/A   |
| <b>Speakers Output Power</b>   | N/A   |
| <b>VESA Mounting</b>   | Yes   |
| <b>On Screen Display (OSD) On Screen Display User Controls User Programmable Modes Monitor Control Buttons or Switches</b> | Brightness, Contrast, Color Control, Input Control, Image Control, Power Control. Menu Control. Management. Language. Information. Exit<br>Yes, 10<br>Menu/OK,<br>Minus button/Down/Information,<br>Plus button/Up/Color Control,<br>Exit/Back/Brightness,<br>Power |

### HP Engage One Peripherals


|                             |   |  |
|-----------------------------|---|--|
|                             | <b>Audio Controls</b>                                   | N/A  |
|                             | <b>Languages</b>  | 10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese) |
| <b>Power</b>                | <b>Power Supply</b>                                     | No   |
|                             | <b>Power Source</b>                                     | USB-C 5V/3A,15W  |
|                             | <b>Power Consumption - Maximum</b>                      | 15w  |
|                             | <b>Energy Saving/Standby Mode</b>                       | 0.5w   |
|                             | <b>Power Consumption - Typical</b>                      | 12w  |
|                             | <b>Power Cable Length</b>                               | N/A  |
|                             | <b>Operational Mode at 100 VAC</b>                      | 18.01KWh/year  |
|                             | <b>Operational Mode at 115 VAC</b>                      | 18.01KWh/year  |
|                             | <b>Operational Mode at 230 VAC</b>                      | 18.01KWh/year  |
| <b>Operating Conditions</b> | <b>Operating Temperature</b>                            | 5° - 35°C<br>41° - 95°F  |
|                             | <b>Non-operating Temperature</b>                        | - 20° - 60°C<br>29° - 140°F  |
|                             | <b>Operating Humidity</b>                               | 20% - 80% (non-condensing)   |
|                             | <b>Non-operating Humidity</b>                           | 5% - 95%   |
|                             | <b>Operating Altitude</b>                               | 0 - 5,000 m (16,400 ft.)   |
|                             | <b>Non-operating Altitude</b>                           | 0 - 12.192 m (40,000 ft.)  |
| <b>Dimensions</b>           | <b>Unpacked without stand</b>                           | 9.69 x 6.07 x 1.38 in<br>24.62 x 17.02 x 3.52cm  |
|                             | <b>Packed</b>   | 12.05 x 4.33 x 9.13 in<br>30.6 x 11 x 23.2cm   |
|                             | <b>Display Head Dimensions (Unpacked without stand)</b> | 9.69 x 6.07 x 0.59 in<br>24.62 x 17.02 x 1.5cm   |
|                             | <b>Base Area Footprint</b>                              | 4.72 x 7.09in<br>119.98 x 179.97mm   |
|                             | <b>Bezel Measurements</b>                               | top 0.063 in, side 0.063 in, bottom 0.063in<br>top 1.6 mm, side 1.6mm, bottom 1.6 mm                       |
|                             | <b>Weight (unpacked with stand)</b>                     | 3.3lb (1.49kg)   |
|                             | <b>Weight (packed)</b>                                  | 4.26lb(single pack) 1.93kg(single pack)<br>23.51lb(bulk pack) 10.67kg(bulk pack)                           |

### HP Engage One Peripherals

|                          |  |   |
|--------------------------|--|---|
| <b>Environmental</b>     | <b>Mercury-free display backlighting</b>               | Yes, Mercury-free LED backlighting  |
|                          | <b>Arsenic-Free Display Glass</b>                      | Yes   |
|                          | <b>Low Halogen</b>                                     | Yes   |
|                          | <b>Agency Approvals and Certifications</b>             | WW application<br>CE/CB/MSIP/Mexico CoC/ICES/ISO 9241-307/ EAC/cTUVus/CCC/TUV-Barunt<br>/VCCI/FCC/RCM/BSMI/WEEE/Ukraine/Morocco |
|                          | <b>Microsoft WHQL Certification</b>                    | Win-7, 8, 10  |
|                          | <b>China Energy Label</b>                              | N/A   |
|                          | <b>TCO Certified Edge</b>                              | No  |
|                          | <b>TCO Certified</b>                                   | No  |
|                          | <b>SmartWay Transport Partnership</b>                  | Yes (NA SKU)  |
|                          | <b>Contains Recycled Plastics in Back Cover</b>        | 85%   |
|                          | <b>Contains Recycled Plastics in Base/Stand</b>        | 85%   |
|                          | <b>Contains Recycled Plastics in Other Parts</b>       | 85% (Deco, Middle Frame)  |
|                          | <b>Recyclable Plastics</b>                             | All   |
|                          | <b>Recyclable Packaging</b>                            | All   |
| <b>Software</b>          | N/A  |   |
| <b>What's in the Box</b> | Captive USB TYPE C cable (1.8m) and stand (15 to +90°) |   |
| <b>Options</b>           | The Engage One POS VESA Plate – 2WY48AA                |   |
| <b>Country of Origin</b> | China  |   |

### HP Engage One Peripherals

#### HP Engage One Hub Mount

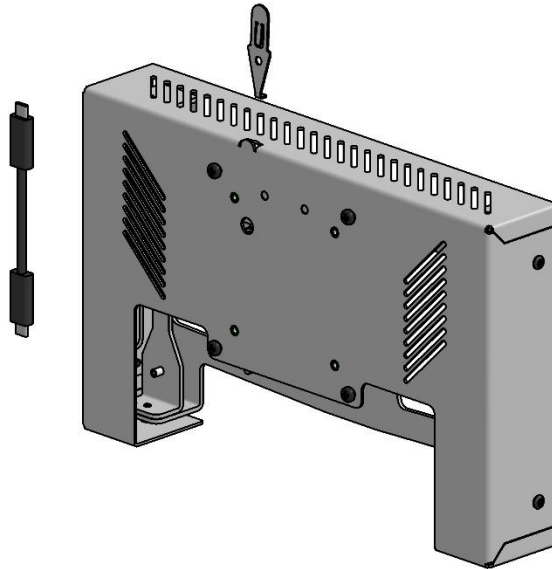

#### Model

HP Engage One Hub Mount

73X09AA


#### Introduction

The HP Engage One Hub Mount pairs together the HP Engage One AiO (RMN: TPC-I025-R) and a choice of the Basic Connectivity Hub (AMO: 1UN11AA#; RMN: TPC-I026-D) or Advanced I/O Connectivity Hub (1UN12AA#; RMN: TPC-1027-D) into a single unit that can be attached to any compatible 75/100 VESA mounting. Please refer to the Engage One AiO Maintenance and Service Guide (<http://h10032.www1.hp.com/ctg/Manual/c06111501.pdf>) for setup instructions.

|                |                               |  |
|----------------|-------------------------------|--|
| <b>General</b> | <b>Color</b>                  | Black  |
|                | <b>Dimensions (L x W x H)</b> | 305 mm x 193 mm x 52 mm (12.01 in x 7.60 in x 2.05 in)         |
|                | <b>Weight</b>                 | 1.69 kg (3.73 lb)  |
|                | <b>Box contents</b>           | Engage One Hub Mount and USB-C 430mm, male/ male cable (black) |

### Cable Routing Configurations

#### Engage One cable matrix with integrated column printer and basic I/O connectivity base

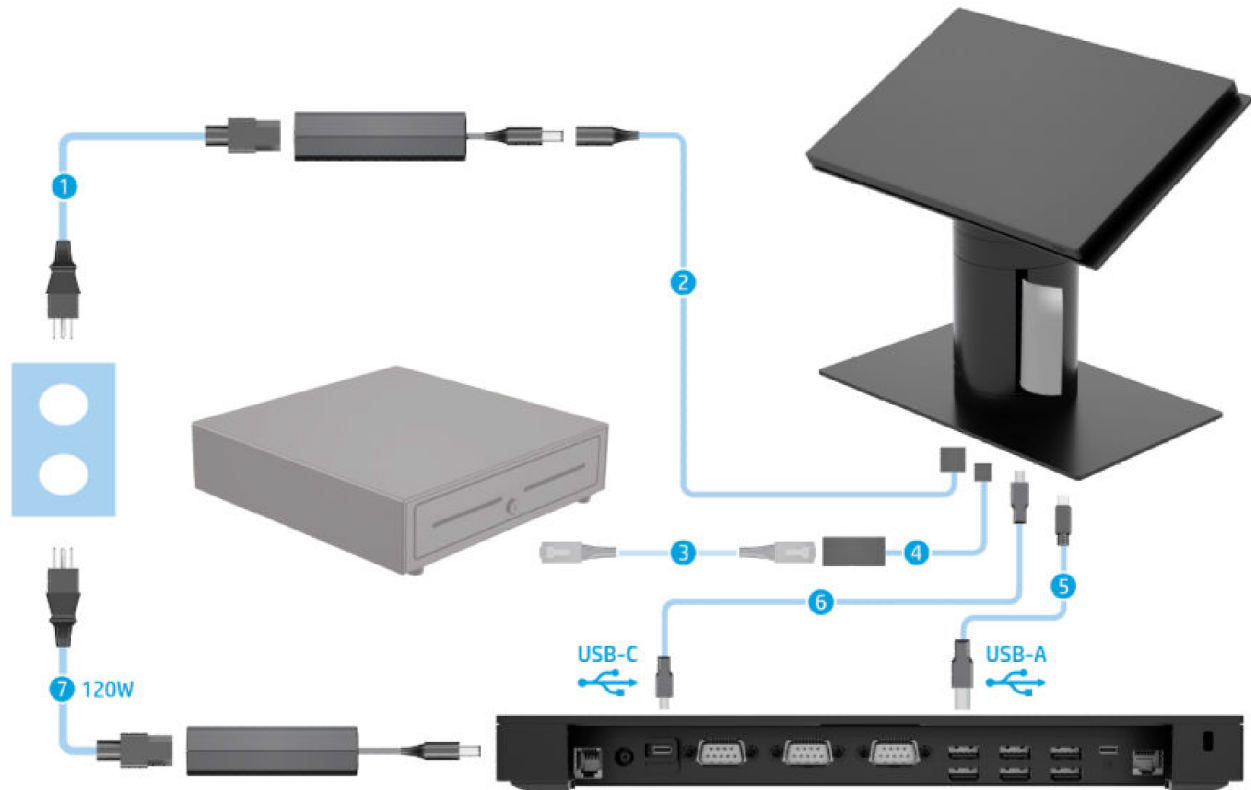


#### Cables

1. Column printer power adapter cord
2. Column printer power cable
3. Cash drawer cable (purchased separately with cash drawer)
4. Column printer cash drawer cable
5. I/O connectivity base mini USB Type-B to USB Type-A data cable
6. I/O connectivity base USB Type-C™ cable connect to the Head unit
7. I/O connectivity base 120 W power adapter cord

### Cable Routing Configurations

#### Engage One cable matrix with integrated column printer and advanced I/O connectivity base

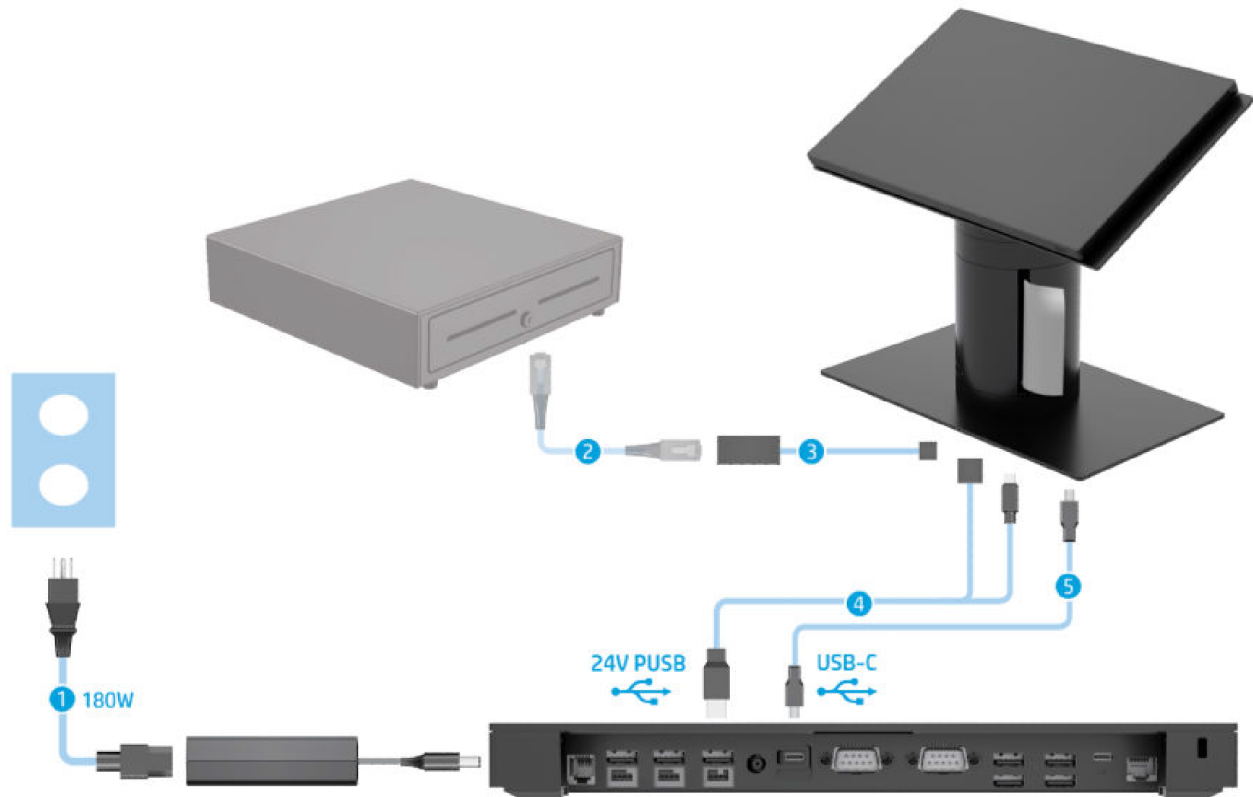


#### Cables

1. I/O connectivity base 180 W power adapter cord
2. Cash drawer cable (purchased separately with cash drawer)
3. Column printer cash drawer cable
4. Column printer 24 V PUSB power and data "Y" cable
5. I/O connectivity base USB Type-C™ cable connect to the Head unit

### Cable Routing Configurations

#### Engage One cable matrix without I/O connectivity base

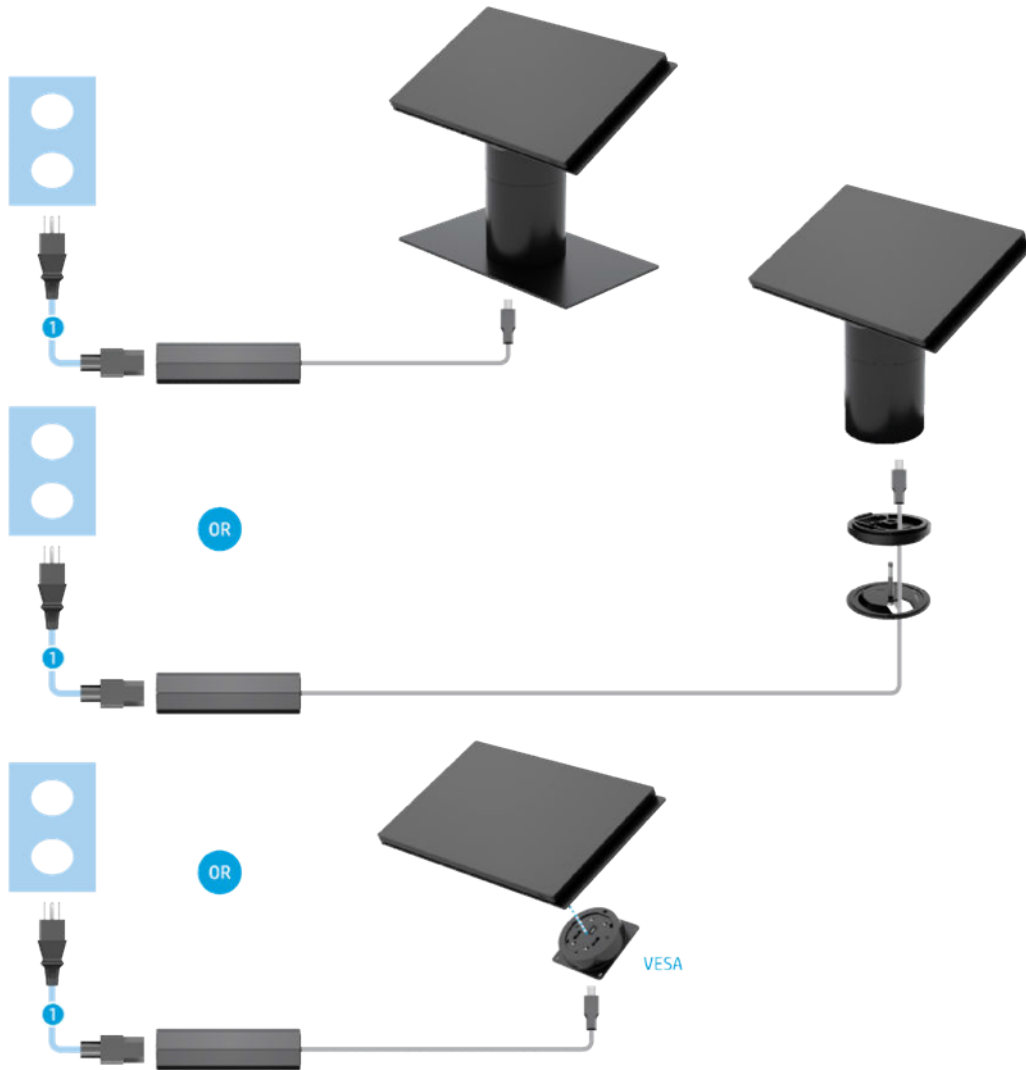


#### Cables

1. Power adapter cord

### Cable Routing Configurations

#### Engage One cable matrix with I/O connectivity base and without printer

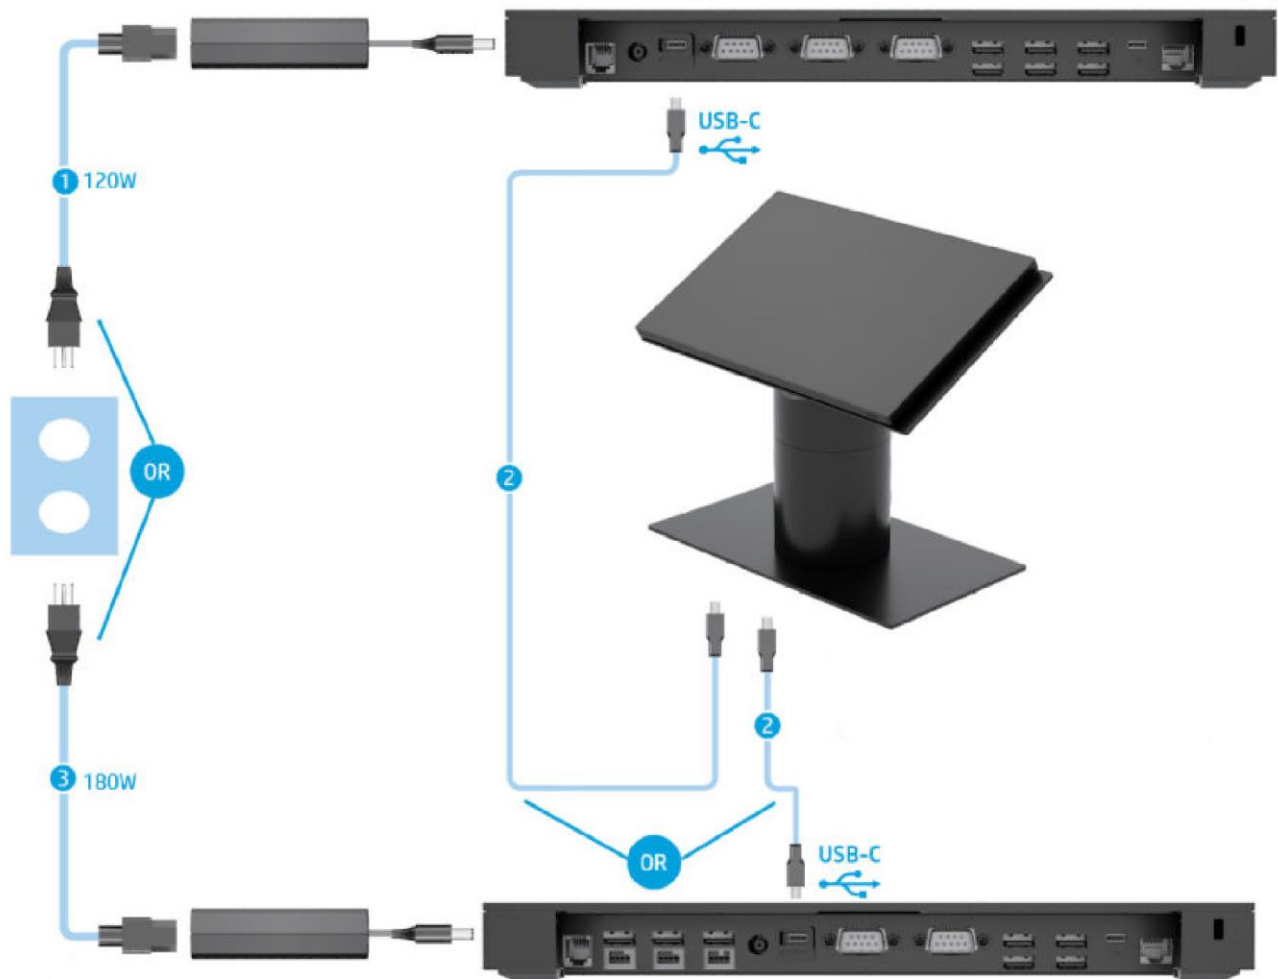


#### Cables

1. Basic I/O connectivity base 120 W AC power adapter cord
2. I/O connectivity base USB Type-C™ cable connect to the Head unit
3. Advanced I/O connectivity base 180 W AC power adapter cord



### Cable Routing Configurations

#### Engage One cable matrix with basic I/O connectivity base and standalone printer

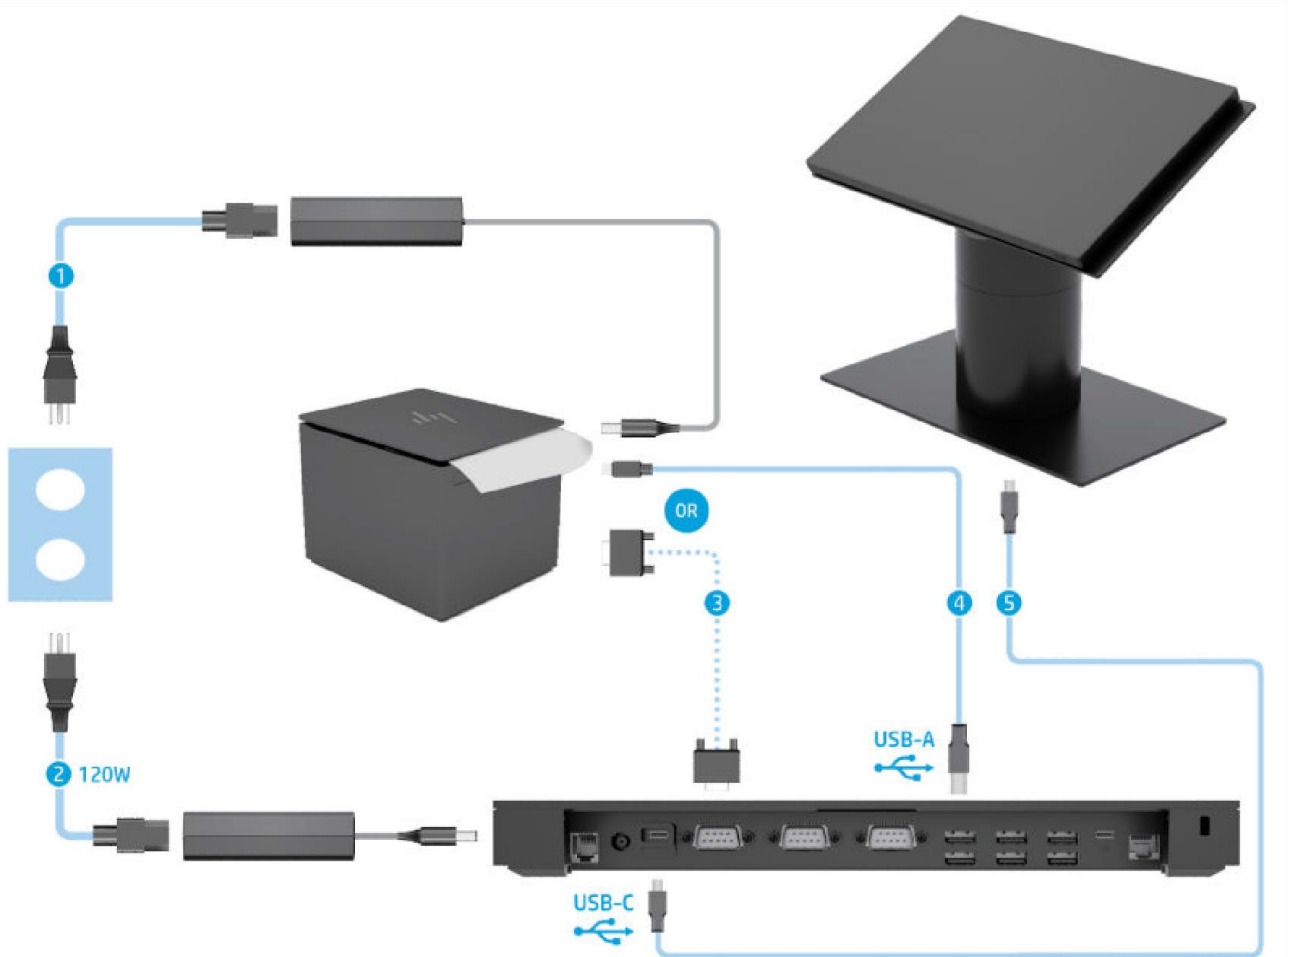


#### Cables

1. Printer power adapter cord
2. Basic I/O connectivity base 120 W AC power adapter cord
3. Printer serial data cable
4. Printer USB Type-A data cable
5. Basic I/O connectivity base USB Type-C™ cable connect to the Head unit

**IMPORTANT:** Connect either the serial data cable (3) or the USB Type-A data cable (4) between the I/O connectivity base and the printer. Do not connect both.

### Cable Routing Configurations

#### Engage One cable matrix with advanced I/O connectivity base and standalone printer

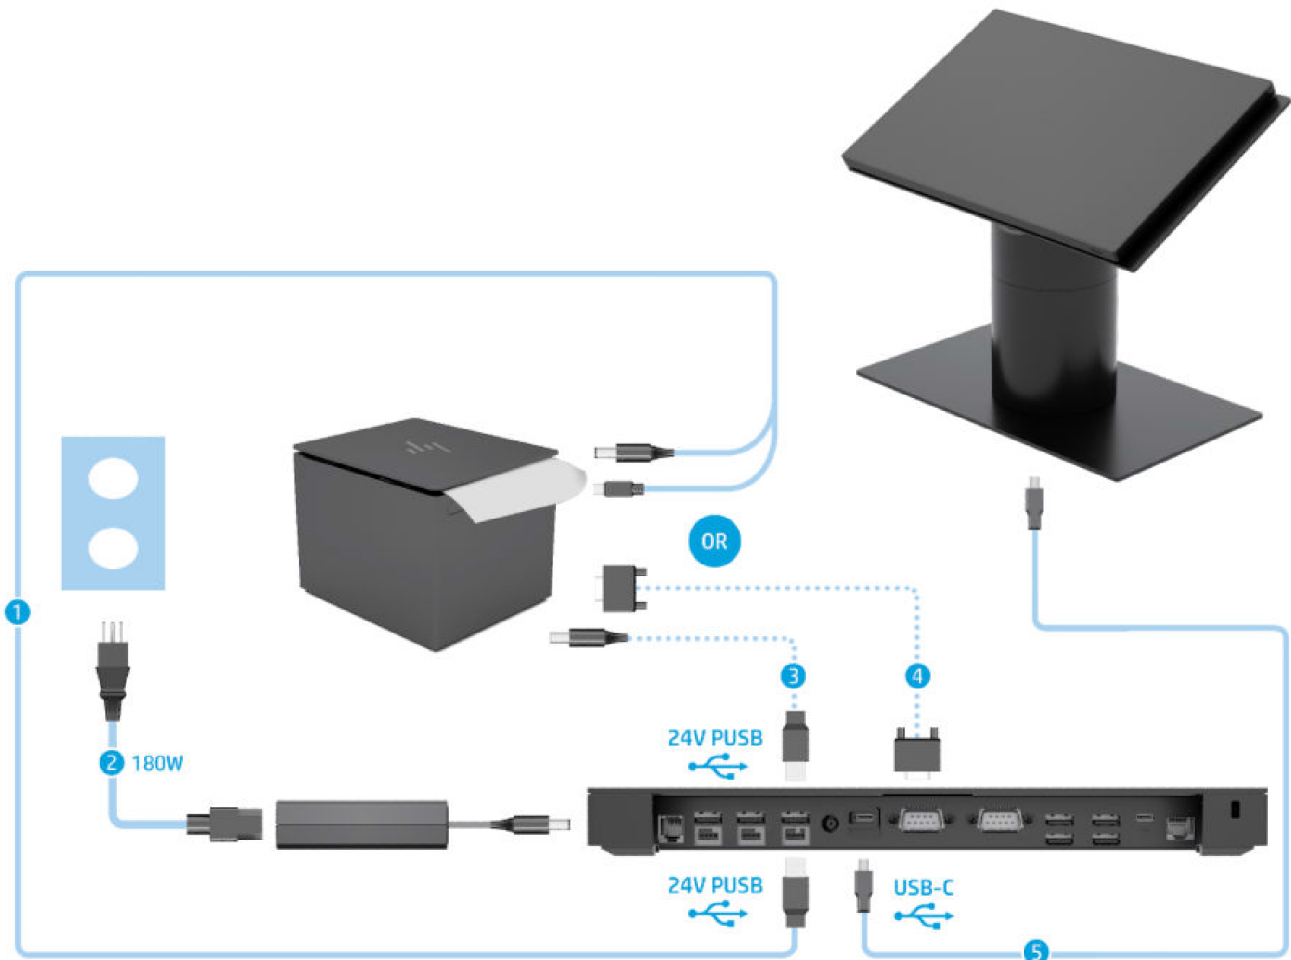

#### Cables

1. Printer 24 V PUSB power and data "Y" cable
2. Advanced I/O connectivity base 180 W AC power adapter cord
3. Printer 24 V PUSB power cable
4. Printer serial data cable
5. Advanced I/O connectivity base USB Type-C™ cable connect to the Head unit

**IMPORTANT:** Connect either the 24 V PUSB power and data "Y" cable (1) or the 24 V PUSB power cable (3) and serial data cable (4) between the I/O connectivity base and the printer. Do not connect both.

### Engage One Accessories

#### Connectivity Bases

HP Engage One Advanced I/O Connectivity Base\*  
HP Engage One Basic I/O Connectivity Base

#### Part Number

1UN12AA  
1UN11AA

#### Printers

HP Engage One Serial USB Thermal Printer  
HP PUSB Thermal Receipt Printer  
HP Serial USB Thermal Receipt Printer  
HP Value PUSB Receipt Printer  
Epson TMT88V PUSB Thermal Receipt Printer  
Epson TMT88V Serial USB Thermal Receipt Printer

1RL96AA  
FK224AA  
BM476AA  
F7M67AA  
E1Q93AA  
D9Z52AA

#### Integrated Peripherals

HP Engage One Fingerprint Reader  
HP Engage One Top Mount 2x20 CFD

1RL98AA  
1RL95AA

#### Customer Facing Displays and Display Options

HP Engage One 10.1in Touch Display\*  
HP Engage One 10.1in Non-Touch Display\*

1XD81AA  
1XD80AA

#### Pole Displays

HP POS Pole Display

FK225AA

[\\*Available November 2017](#)

### Engage One Accessories

#### Cable kits for stand alone printer

|   | <b>Part Number</b> |
|---|--------------------|
| HP Engage One Printer USB + Pwr Adppter       | 1RM02AA            |
| HP Engage One Printer Serial + Pwr Adptr      | 1RM03AA            |
| HP Engage One Printer PUSB Y Cable            | BM477AA            |
| HP Engage One Printer Serial + PUSB Pw only   | 1RM05AA            |
| HP Engage One W Printer USB + Pwr Adppter     | 3WV53AA            |
| HP Engage One W Printer Serial + Pwr Adptr    | 3WV54AA            |
| HP Engage One W Printer PUSB Y Cable          | 3WV55AA            |
| HP Engage One W Printer Serial + PUSB Pw only | 5FW23AA            |

#### Graphics Video Adapters & Cables

|                                   |         |
|-----------------------------------|---------|
| HP Type-C™ to DisplayPort Adapter | N9K78AA |
| HP Type-C™ to HDMI Adapter        | N9K77AA |
| HP Type-C™ to VGA Adapter (Slice) | N9K76AA |

#### IO Devices, I/O Adapters

|   |         |
|---|---------|
| HP USB to Serial Port Adapter (Win7/8/10) | J7B60AA |
| HP USB Business Slim Keyboard             | N3R87AA |
| HP USB 1000dpi Laser Mouse                | QY778AA |
| HP USB Hardened Mouse                     | P1N77AA |
| HP USB Optical 2.9M Mouse                 | Z3Q64AA |
| HP POS Keyboard                           | FK221AA |
| HP POS Keyboard with MSR                  | FK218AA |
| HP PUSB Y Cable                           | BM477AA |
| HP USB-C™ to RJ45 Adapter                 | V7W66UT |

#### Hub Mount

|                         |         |
|-------------------------|---------|
| HP Engage One Hub Mount | 73X09AA |
|-------------------------|---------|

#### Scanners

|                                  | <b>Part Number</b> |
|----------------------------------|--------------------|
| HP Engage One 2D Barcode Scanner | 1RL97AA            |
| HP Wireless Barcode Scanner      | E6P34AA            |

#### Cash Drawers

|                              |         |
|------------------------------|---------|
| HP Flip Top Cash Drawer      | BW867AA |
| HP Heavy Duty Cash Drawer    | FK182AA |
| HP Standard Duty Cash Drawer | QT457AA |

### Engage One Accessories

|  |         |
|--|---------|
| HP USB Standard Duty Cash Drawer             | E8E45AA |
| HP Standard Duty Till Insert w/ Lockable Lid | QT458AA |
| HP Cable Pack for Dual HP Cash Drawers       | QT538AA |

### Summary of Changes

| <b>Date of change:</b> | <b>Version History:</b> |         | <b>Description of change:</b>  |
|------------------------|-------------------------|---------|--|
| August 16, 2017        | From v1 to v2           | Changed | Format on sections   |
| August 25, 2017        | From v2 to v3           | Added   | Notes about the Mounting bracket, BIOS support and the MSR, added Packaging Weights  |
|                        |                         | Changed | Format on sections   |
| September 22, 2017     | From v3 to v4           | Changed | HP ElitePOS PUSB Y Cable part number to BM477AA.<br>HP ElitePOS Printer PUSB Y Cable part number to BM477AA  |
| October 19, 2017       | From v4 to v5           | Added   | HP USB-C Mini Dock to base choices, Added specs for HP USB-C Mini Dock, Added Specs for ElitePOS Touch Display and ElitePOS Display                          |
| October 19, 2017       | From v5 to v6           | Added   | The ElitePOS POS VESA Plate – 2WY48AA as an option for ElitePOS Touch Display and ElitePOS Display   |
| January 14, 2018       | From v6 to v7           | Added   | Part number for white models and color specs   |
| January 26, 2018       | From v7 to v8           | Changed | System interface value to USB 3.0  |
| June 25, 2018          | From v8 to v9           | Changed | USB section and vPRO disclaimer  |
| August 1, 2018         | From v9 to v10          | Changed | Series name  |
| August 8, 2018         | From v10 to v11         | Changed | Images   |
| September 12, 2018     | From v11 to v12         | Added   | Cable kits available for the HP Engage One Serial USB Thermal Printer (White)  |
| October 31, 2018       | From v12 to v13         | Changed | Longevity and Upgrading section  |
| August 1, 2019         | From v13 to v14         | Changed | Operating System section   |
| August 22, 2019        | From v14 to v15         | Changed | Cable Routing Configurations   |
| September 25, 2019     | From v15 to v16         | Added   | HP USB-C to RJ45 Adapter to Accessories section  |
|                        |                         | Changed | TEMPERATURE, HUMIDITY, ALTITUDE section  |
| October 9, 2019        | From v16 to v17         | Changed | At A Glance, HP Engage One Column Printer, HP Engage One Serial USB Thermal Printer, HP Engage One 10.1" Display, HP Engage One 10.1" Touch Display sections |
| January 24, 2020       | From v17 to v18         | Changed | Operating System section   |
| June 26, 2020          | From v18 to v19         | Changed | Environmental Data section   |
| July 15, 2020          | From v19 to v20         | Changed | Environmental Data section   |
| October 15, 2020       | From v20 to v21         | Changed | Security section and changed Energy Star and EPEAT certifications  |
| February 10, 2021      | From v21 to v22         | Changed | Engage One Accessories section   |
| March 26, 2021         | From v22 to v23         | Changed | At A Glance section  |
| July 22, 2021          | From v23 to v24         | Removed | SD card reader reference   |
| October 13, 2021       | From v24 to v25         | Changed | HP Engage One 10.1" Display, HP Engage One 10.1" Touch Display sections  |
| April 22, 2022         | From v25 to v26         | Changed | OPERATING SYSTEM section   |
| May 2, 2022            | From v26 to v27         | Changed | POWER section  |
| September 15, 2022     | From v27 to v28         | Added   | HP Engage One Hub Mount to Engage One Accessories section  |
| October 6, 2022        | From v28 to v29         | Added   | HP Engage One Hub Mount specs  |
|                        |                         | Removed | HP Engage One Serial USB Thermal Printer   |
| November 4, 2022       | From v29 to v30         | Removed | Android support  |
| November 18, 2022      | From v30 to v31         | Added   | Introduction information to the HP Engage One Hub Mount section  |
| January 26, 2023       | From v31 to v32         | Added   | HP Engage Column Printer G2 section  |
|                        |                         | Removed | HP Engage One Column Printer section   |
| February 6, 2023       | From v32 to v33         | Changed | HP Engage One Hub Mount section  |
| May 2, 2023            | From v33 to v34         | Changed | Format page 54, OPERATING SYSTEM, HARD DISK AND SOLID STATE STORAGE sections   |
| November 10, 2023      | From v34 to v35         | Changed | HP Engage One Fingerprint Reader section   |

## Summary of Changes

Copyright © 2023 HP Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows 8, and Windows 10 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel®, Celeron®, Pentium® and Core™ are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Linux is the registered trademark of Linus Torvalds in the U.S. and other countries. Bluetooth® is a registered trademark of its proprietor and used by HP Inc. under license. ENERGY STAR® is a registered trademark owned by the U.S. Environmental Protection Agency.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.